


WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Ol. LXXIV. - Vo. 8.7

NEW YORK, FEBRUARY 22, 1896

(\$3.00 A YEAR. WEEKLY.

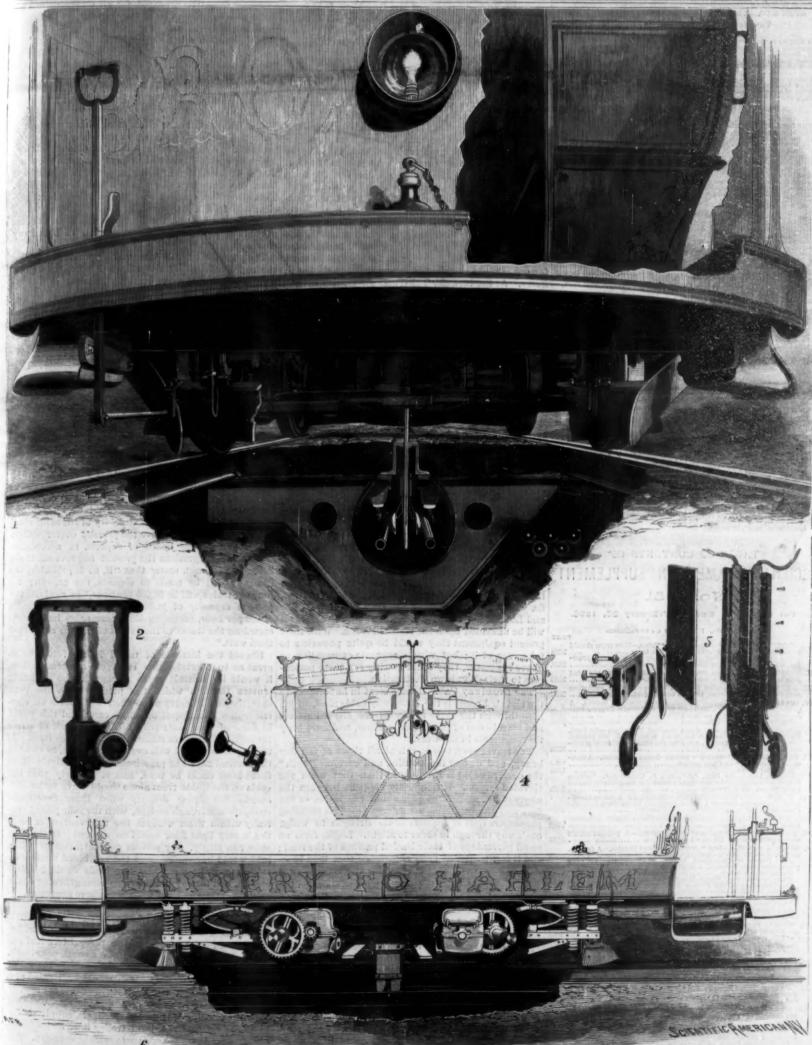

1. End view of conduit and car connections. 2. Insulating socket and hanger bar. 3. Contact bar and connection. 4. Comparison of electric and cable systems. 3. Details of plow.

THE UNDERGROUND TROLLEY STREET RAILWAY IN NEW YORK CITY .- [See page 119.]

Scientific American.

ESTABLISHED 1945

MUNN & CO., Editors and Proprietors, PUBLISHED WEEKLY AT

No. 361 BROADWAY, NEW YORK.

TERMS FOR THE SCIENTIFIC AMERICAN. (Established 1845.)

The Scientific American Supplement (Established 1876)

is a distinct paper from the SCENTIFFC AMERICAN. THE SUPPLEMENT is issued weekly. Every number contains he octaro pages, uniform in size with SCENTIFFC AMERICAN. Terms of subscription for SUPPLEMENT, S.68 a year for the U.S. Causada or Marico, Mala a year to forcers countries belonging to the Prestal Union. Single copies is ceeded, Sold at an exact page of the country. See prospectua, led pages to force the countries belonging to the Prestal Union. Single copies is ceeded. Sold by all newspecials and provided in the countries of the countries o

Building Edition of Scientific American.

(Established 1885.) ESTADISHO EDITION OF THE SCHETTIFIC AMERICAN is a large assistive illustrated periodical, insigned monthly, containing floor plan acapactive views pertaining to modern architecture. Each number architecture views pertaining to modern architecture, Each number and architectural spints, showing desirable dwellings, publings and architectural social in the work is truvaluable. To architectural section this work is invaluable, and a some To foreign Postal Union countries, SLO a year need rate for SULIDAN, EASTHON WITH SCHETTIFIC AMERICAN, to one, \$4.50 a year. To foreign Postal Union countries, \$6.50 a year need rate for SULIDAN, EASTHON WITH SCHETTIFIC AMERICAN, to one of SULIDAN, EASTHON SCHETTIFIC AMERICAN, to one of rest of SULIDAN, EDITION, SCHETTIFIC AMERICAN, and SUPERIT, \$6.50 a year. To foreign Postal Union countries, \$1.10 a year.

Export Edition of the Scientific American (Established 1878)

ch is mearyogated "LA ABBRICA CHENTIFICA E INDUSTRIAL," or edition of the SCHENTIFIC AMERICAN published moothly, union and typectraphy with the SCHENTIFIC AMERICAN. Butter in using about 30 pages, profusely illustrated. It is the finest scientific, all export paper published. It circulates throughout Chies, the loss, Mexico. Control and South America, Spain and Spanish powers. A Expostral England Inspector of species. The SCHENTIFIC AMERICAN ENGLANDS AND AMERICAN ENGLANDS AND AMERICAN ENGLANDS AND AMERICAN SCHENGER STORMAN AND AMERICAN SCHENGER SCHENGER SCHENGER STORMAN AND AMERICAN SCHENGER SCHE

The nafect way to result is by postal order, express money order, or bank check. Make all resultinaces payable to order of MUNN aders are sectially requested to notify the publishers in case of re, delay, or irregularity in receipt of papers.

NEW YORK, SATURDAY, FEBRUARY 22, 1896.

Contents.

(Illisstrated art

Photography, the Problem, transportation, in every City York City Railway, street, esectric, N. Y.* Hoentgen's discovery Roentgen, Prof. (a portrait)*... Scapeuds on the waves Scythe adjusting device, Fred-srickson's*

125

TABLE OF CONTENTS OF

SCIENTIFIC AMERICAN SUPPLEMENT

No. 1051.

For the Week Ending February 22, 1896.

Price 10 cents. For sale by all newsdealers.

I. AKBORICULTURE.—Praning of Screet Trees.—How trees should be pruned.—Scientific treatment of shade trees. The Sarutur Tree of Sures.—A cariously poisonous tree growing in a botanic garden at Madras, India. II. BIOGRAPHY.—The New Post Laureate.—The newly appointed post laureste of England, his life and house.—I illustration...... III. HOTANY.—An Explosive Fruit.—Ulustration of an explosing seed capsule with notes on the life of the plant.—I illustration...

time of engressing mercus, the of America (T. Ri-Revision December 1971). The Committee of Bectrical Notes.
The Arc Light. By Prof. Silvants P. Thompson. Lecture
The Arc Light. By Prof. Silvants P. Thompson. Lecture
III.—Continuation of this exhaustive treation on arc lamps of all

III.—Continued of it instrations.

VII. ELECTRICAL ENGINEERING.—Continuous Electric Smelling Furnace.—An electric furnace designed to preduce continuous smelling by the electric are.—I illustration.

Presture of Glass Water Gages.—3 illustra-

MINCRLLAN BOUS.—Bad Revenues in Good Bottles.—A fraudu-lent practice which has attained widespread usage.—A fraudu-Book Plates of Celebrased Women.—Bepreduction of book plates of historic interest.—5 illustrations.

ancome Notes for Hencilt of Sottle Manufacturers stenary of the French Institute. The famous French alls origin, present status, and recent centenary.—5 illus-

RIII. ORNITHOLOGY.—The fittle of N.
By G. S. MRAD.—A popular article
Gurmen, associable with repeat to it.

We have shown in a preceding issue that the difficulties of the rapid transit question in New York are caused by the peculiar nature of the site upon which the city is built—an extended peninsula with a broad belt of water bemming it on three sides-and that there would be a prejudice against any scheme of underground transit which would seriously imperil its success, should it ever be built. The statistics of the amount and increase of travel in recent years prove very clearly that, bad as the crowding on the leading lines of travel now is, it will rapidly become much worse. The situation calls for immediate action; and unless some means be devised of quickly enlarging the present carrying capacity of the Brooklyn Bridge, of the elevated roads, and of the Broadway cable road, we shall see at no very distant date a veritable deadlock on these lines of travel during the morning and evening rush to and from the lower city.

The Elevated Roads,-The simplest and most natural way to enlarge the capacity of the elevated roads would be to lay two additional tracks; widening the existing structure wherever it might be necessary. The two outer tracks could be utilized for local traffic and the two inner tracks for the through traffic to Harlem and the suburbs beyond. This scheme would involve the four-tracking of the Third and Sixth Avenue lines, whose carrying capacity is at present the most heavily taxed. On the Third Avenue line the fourtracking could be completed without a break from City Hall Park to the Harlem River; and from Chatham Square to South Ferry it would be possible, by reducing the distance between centers of tracks to the smallest allowable limit, to lay a third track. On the Sixth Avenue line two extra tracks could be laid from Chambers Street to Harlem, and there would be room for one extra track from Chambers Street to the South Ferry. At the turns at Third and Fifty-third Streets the lack of space would necessitate a separation of the four tracks, two of them being carried around the block and through the next cross street; but this arrangement would present no difficulties in the operation of the road. With such an extension of the system the elevated roads would be capable of handling their traffic with facility and at a greatly accelerated speed. By utilizing the inside tracks for a swift through service to the upper city, a large portion of the traffic could be picked up at suitably chosen downtown stations, and carried to the Thirty-fourth Street Ferry, the Grand Central Station, or to the outlying districts at or beyond the Harlem River, in one-half the time that is now consumed on the journey. This would instantly relieve the crowded state of the local traffic: and the interest on cost of the new construction would be more than covered by the receipts from the increased travel to the upper city which would follow upon the opening of so vastly improved a service.

Such an enlargement of the capacity of the elevated roads would not only relieve the present overcrowding. but it would prepare them for the increase of travel which will result from the completion of the new East and North River bridges. These bridges will attract a considerable portion of the present ferry traffic to themselves; they will also carry a large through traffic, which will converge to them from the New Jersey and Long Island suburbs; and the bulk of this travel will be unloaded upon the elevated roads. With their present equipment they would be quite powerless to than wait." take care of it; but with a separate express line, as above suggested, they could quickly run these passengers to their downtown destination.

The Broadway Cable Road.—Next in importance to runs through the main artery of the city's business and travel-one of the longest, richest, and most busy thoroughfares in the world.

The travel upon this road is at all times of the day heavy, and during the morning and evening "rush" cars and the platforms are so crowded with standing passengers that it requires brute strength to wedge one's way through in order to alight. Ladies form no small percentage of these herded patrons of the road; and it is a matter of daily occurrence that lady typewith their day's work in the city, have to stand on the platform, in such a crowd, often subject to the exposure of the weather, for a distance of twenty or thirty blocks!

It is impossible to increase the capacity of this road by the means suggested for the elevated system. The existing tracks, as it is, are a serious obstacle to vehicular traffic; and the laying down of any more is out of the question. For the same reason it would be inexpedient to run two or three cars coupled together: stopping at the crossings, they would seriously interfere with the east and west bound traffic. There is another means of increasing the capacity of the road, which, though it is comparatively novel in America, decking the cars. By resorting to this expedient the shall permanently relieve the situation.

THE TRANSPORTATION PROBLEM IN NEW YORK CITY. accommodation of the system could be doubled in a comparatively short time.

> The double-deck car is not an experiment: it has been tested, and is now running on many of the street lines of European cities. The upper story is a duplicate of the lower story, and it is reached by a winding stairway at each end of the car, which is provided with a stout hand rail; the steps, risers and sides of the stairs being formed of solid plating. Such a car will carry upon the same length of wheel base just double as many passengers as the ordinary car.

> By placing upon the road a limited number of double-deck cars and running them during the busiest hours of the night and morning traffic, the cable company would be prepared for all emergencies and could give its patrons what they pay for, and what at present more than half of them seldom get-a s. at.

> The objection will be urged that the swing of the cars in rounding the street corners would be liable to throw passengers from the stairways, and to meet this it would be necessary to substitute transition or easement curves for the present sharp and most uncomfortable curves; such, for instance, as exist at the entrance to Union Square.

> The transition curve commences with a very small deflection angle, which increases gradually as the curve proceeds. By this means the violent lateral lurch, which now makes travel hideous at such points on the line, is avoided; the car being imperceptibly deflected from the tangent upon which it has been running. This alteration, coupled with the insertion of a superelevation in the onter rail of 1% or 2 inches, would enable cars to round these curves with a smoothness of running which would be a revelation to Broadway

The adoption of such cars would necessitate raising the superstructure of the elevated road some 5 or 6 feet, at such points of crossing as occur at Thirtythird Street; and the columns would have to be lengthened by varying amounts for a distance of 500 to 600 feet on each side of the crossing, so as to carry the roads over on an easy grade.

This scheme for the relief of Broadway traffic could be quickly carried out, and, in view of the immense relief it would bring, its cost would be moderate. It is perfectly practicable; and the reserve of carrying power which it would place at the disposal of the company would enable them to cope with any possible inrease of travel for many years to come.

The Brooklyn Bridge.—Perhaps the most seriously encumbered line during the busiest hours of travel is that across the Brooklyn Bridge. Here, more than anywhere else, some immediate plan of relief is called for, and it is gratifying to learn that with the opening of the new terminals, and the doubling of the present switching capacity, it will be possible to decrease the headway between trains from 11/2 minutes to 45 seconds. This will double the capacity of the cable road, and should go far to relieve the present overcrowding. The report of the board of experts, in accordance with whose suggestions the present improvements are being carried out, states that "if, as is probable, the headway can be made 40 seconds, the capacity for four-car trains will be 36,000 per hour," as against the present capacity of 16,000, "and for five-car trains 45,000 per hour, assuming that passengers insist upon crowding the trains to the extent of 100 per car rather

Should the increase of travel in the future be so great as to overtake this enlarged accommodation, it would be feasible so to strengthen the stiffening trusses through which the present cable line runs the elevated roads is the Broadway cable road, which that they could carry upon their top chords an electric trolley line, operating single cars; and this could be done without materially raising the unit of stress throughout the main members of the bridge itself. If the tracks were laid well over to the inside, as close to the vertical cables as practicable, comparatively light the overcrowding is even worse than that upon the floorbeams could be used, and it is likely that the elevated system. It frequently happens between the posts on the inside truss alone would have to be stifhours of five and six at night that the inside of the fened. By laying directly upon these floorbeams stringers of a trough section, with the rails placed centrally within them without the intervention of cross ties, a very light floor would be secured. If the cars were run singly, any serious concentration of rolling load would be avoided, and the combined stresses rewriters and clerks, who are returning home, wearied sulting from the dead and live loads would not, it is certain, call for any considerable strengthening of the existing trusses beyond what was above suggested.

The trolley line would run above the present ca line until the end of the trusses was reached, when it would swing out over the roadway on either side, finishing in a loop in front of the present terminal stations. The cars would thus run on a continuous track, without switching; and they could handle the traffic at the curved platforms, which would be located at a sufficient height to clear the existing cable car line.

The increased capacity of the cable road resulting from the opening of the new terminals, supplemented at an early date by a light trolley line, as indicated above, would provide adequate senting capacity, until would be perfectly feasible, and that is by double- the opening of the new bridge further up the river

ROENTGEN'S DISCOVERY.

iring the last week innumerable reports of work in ray photography have appeared in the columns of the various journals, scientific and otherwise, but comparatively little new matter in them. It still ears that Prof. Roentgen gave the matter so rough a treatment before publishing his results t it has taken the rest of the scientific world a uth to catch up with him. It is said that photographs taken by him are better than the majority of se taken by other experimenters. His modest paper on the subject of his discovery has not been ex ded in interest, clearness of statement, and preci-

Prof. Roentgen's discovery is shown in that paper, given in our SUPPLEMENT, No. 1050, to have been developed from experiments with a fluorescent surface. Such a surface he found was rendered luminous by the X rays after they had passed through an opaque To go from a phosphorescent surface to the sensitized photographic plate was quite natural. Now we hear of an investigator retracing this step and returning to the phosphorescent plate with the most interesting results.

Prof. Salvioni, of Perugia, on Saturday, February 8, read a paper before the Rome Medical Society, describing an apparatus of his own invention which enables the eye to see the Roentgen effect. As imperfectly described in a cable from Rome, a tube is employed and the shadow produced by the X rays is cast

upon a fluorescent surface, the object to be examined having been placed between the observation tube and the Crookes tube. perfect shadow is thus procured, and the outer end of the tube is provided with a lens by which the image may be intensified for purposes of examination. It is a substitution of the retina of the eye for the photographic surface, with this difference, that to produce a visible effect the Roentgen rays have first to produce true light rays. This they are made to do by a fluorescent surface. It will be seen that this is merely a reproduction and development of Roentgen's first experiments, for if the rays can render a fluorescent surface luminous, the possibility of the production of shadows upon such a surface almost necessarily follows. Prof. Salvioni calls his highly interesting apparatus the cryptoscope. When the stethoscope was first invented, it was bailed as a great achievement in revealing to the auscultator the secrets of the operations of the human system. But if the cryptoscope can be sufficiently developed, it will place a more powerful instrument of research in the physician's hands, by which he will be able to see the shadows of the bony framework of the animal system without an appeal to photography.

We present our readers with a portrait of Prof. Roentgen, and the following notes of his biography will be of interest.

Wilhelm Conrad Roentgen was born in 1845 in Holland. He graduated at the University of Zurich, taking his doctor's degree at the age of twenty-five. At this university he was the favorite disciple of Prof. Kundt. When the latter left Zurich for Würzburg,

Roentgen went with him, and the two next received traction consisted in the electric equipment of its old by eight tunnel in a day in the hardest rock. The assistant respectively. This was in 1873. In 1875 he held the chair of mathematics and physics at the Agricultural Academy of Hohenheim in the kingdom of Württemberg.

Hohenheim is a hamlet some four miles southschool of agriculture. He returned a year later to Strasburg, and in 1879 was professor in and director of the University and Institute of Physics in the old university town of Giessen, a city rendered illustrious before this time by the labors of the great Liebig. In 1888 he returned to his old college at Würzburg, where he now holds his professorship. His published papers began to appear in 1873. The isothermal surfaces of crystals and calorimetry of the sun, using an ice calorimeter; electrically produced dust figures and transmission of the electric discharge through gases; diathermacy, a new aperoid barometer, flame sounds, and are typical subjects of his original invertigations.

His essays may be found in Poggendorff and Wiedmann's Annalen, the Zeitschrift für Kristallographic, the reports of the Vienna Academy of Scinces, of the Gesellschaft der Wissenschaften of Göttingen, as well as in those of the Gesellschaft fur Natur und Heilkunde of Upper Hesse and of the Physico-Medical Society of Würzburg.

We are indebted to L'Illustration for the portrait of Prof. Roentgen which we reproduce with this THE COMPARATIVE ECONOMY OF THE ELECTRIC AND THE CABLE CAR SYSTEMS.

Writing under the title, "The doom of the cable in San Francisco," Mr. S. L. Foster, in a communication to the Street Railway Journal, gives an account of the recent change of a San Francisco road from the cable to the electric system.

The writer's deductions are based upon the experience of the Market Street Railway Company, which owns both electric and cable roads, and "has been making data for itself."

The conditions for the test were excellent, for the reason that the climate is favorable to cable traction, of deductions, by all which has been published there being no snow or ice to prejudice the results against the cable; and, further, that the original construction and present working condition of the San Francisco cable roads is unsurpassed. As the result of its experience with the two systems, "the Market Street Company has become convinced that the people prefer to ride on the electric cars, and that the electric cars carry the people more cheaply then does the cable. These results were not obtained from a few electric cars run on level lines and at high rates of speed, but from the operation of upward of 150 cars at from 11/4 to 21/4 minutes headway at times, and on lines having grades as high as 141/2 per cent. Most of these cars are subject to frequent interference from the heavy wagon traffic on the downtown streets, and all of them are governed by the rule ordering a reduction of speed at the crossing of each intersecting street."

WILHELM CONRAD ROENTGEN.

appointments in Strasburg University as professor and horse car lines. Next, a route for which \$30,000 worth latter, being crushed as fine as wheat grains, is carried assistant respectively. This was in 1873. In 1875 he of cable had already been purchased was similarly to the rear and dumped in a car. The drill points of cable had already been purchased was similarly equipped; and the continued success of the experiment led to a general order that electric roads should be laid down on all new franchises. The most startling decision of all, however, was that which ordered southeast of Stuttgart, little known except for its the abandonment of the cable on Ellis Street, and the substitution of electricity; for not only was this particular line paying well at the time, but it is a line with many long and heavy grades-conditions which are generally supposed to be unfavorable to electric, and calling specially for cable traction. The superior economy of the system is thus summed up by Mr. Foster: Every time a cable power house can be dispensed with and the lines operated by electricity, that power house's item "labor" is wiped out, and the item fuel" is reduced both on account of the less fuel required per car mile for an electric road as against a cable road and because the cable houses are usually run non-condensing, whereas in the electronic house the engines are run condensing. The original Ellis Street cable line was 9,000 feet long; and of this, 6,750 feet was changed to single track and 2,900 to double track electric road.

> The cable road was 31/2 feet gage and 111/4 feet centers, and the electric single track was laid between the two cable tracks. In changing the 31/2 feet gage to 4 feet 81/4 inches on the 2,750 of electric double track, ties were laid, as before, between the two tracks, and the inside rail of each track moved out onto the center ties. The yokes and the concrete tube were left un

touched. The cable also was left in the tubes, and will be utilized for the return circuit.

In addition to the above important change, the Oak Street line, whose cable is 26,000 feet long, is being reconstructed as an electric road, and as soon as this has been done, the two large power houses, which have run this and the Ellis Street cable, will be closed.

San Francisco may be called the cradle of the cable road system. It was in 1873, or over 22 years ago, that the Clay Street cable, the first street railway of this kind in the world, was built; and the object of the use of the cable was to overcome the grades of from 10 to 16 per cent that exist on that street.

To any one who is acquainted with San Francisco and has ridden over the precipitous grades of its cable roads, this substitution of electrical traction will be very significant, and we feel the full force of Mr. Foster's conclusions: "When we consider the daily spectacle of electric cars, unaided, climbing 141/2 per cent grades in San Francisco and 15 per cent grades in Oakland, and by means of a simple auxiliary device ascending a 25 per cent grade in San Francisco, where no cable grip could be made to hold, the impregnability of any cable proposition is open to question.

Trees Fired by Electric Wires.

Citizens of Brooklyn, N. Y. were treated to an unusual exhibition of pyrotechnics on the evening of January 24, when three big trees became charged with electricity and sparked and crackled so that the neighborhood The first experiments of the company in electric was illuminated and finally the firemen were brought to

the scene. An arc light wire passed through the branches of the big trees and it is thought that the high wind of the day had caused the insulators to become worn, so that enough electricity escaped from the electric light wires to cause the display. At one time it looked as though houses in the neighborhood would be set on fire. The police were summoned and finally the firemen. After two hours' work the firemen succeeded in extinguishing the flames. The adjoining. trees on the block then began to throw out sparks from their branches and the firemen were kept busy throwing water on the streams of fire, until the electric light company were ordered by the fire department to switch off their dynamos. A gang of linemen were then sent to string a new wire. Property in the neighborhood was damaged to the extent of \$1,500.

A New Tunneling Machine.

An inventor is having built a machine by which he proposes to revolutionize the present methods of tunneling, the capacity of the device for "sawing out a tunnel." as claimed, being at the rate of twenty-three feet a day. The apparatus is described as being twelve feet long, four feet wide, and six feet high, and, with the fourteen horse power engine which runs it, weighs some 6,300 pounds. The principle is that of a circular saw. Sixty drill points attached to each of two wheels, four feet in diameter and eight inches wide, make 600 revolutions per minute. The points are one-half an inch apart, every revolution feeding one-eighth of an inch, and the enthusiastic inventor declares that it will cut twenty feet of a six

weigh one-fourth of a pound each, last four days, and are kept cool by means of a steady stream of water. Three men are required to run the machine.

The New Photograph.

The new photography has moved the English heart to poetry. The following verses are not by the new Poet Laurente, but they shed new light upon the future uses to which the shadow pnotograph may be put. Our thanks are due to London Punch, to whom we are indebted :

> And not a trick of idle re That bids us each beware of you And of your grim and graveyard humor

We do not want, like Dr. Swift, To take our seeh off and to pos Our bones, or show each little rift t for you to poke y

We only crave to contemplate Each other's usual full dress photo; Your worse than "altogether" state Of portraiture we bar in toto !

The fondest swain would scarcely prise A picture of his lady's framework; To gase on this with yearning eyes Would probably be voted tame work.

No, keep them for your epitaph, These tombstone souvenirs unpleasant; Or go away and photograph Mahatmas, spooks, and Mrs. Bennat.

A READILY ADJUSTABLE SCYTHE.

The illustration represents a device adapted to facilitate the adjustment between the blade and snath of a brush, a cradle, or a hay scythe, enabling the operator to adjust the blade at any desired inclination to the snath, by means of a gage engazing the heel portion of the scythe and the contacting portion of




FREDERICKSON'S SCYTHE-ADJUSTING DEVICE.

the snath. The improvement has been patented by Christian Frederickson, of Cameron, Wis. Fig. 2 is a plan view of the heel portion of a scythe blade, and Fig. 3 is a bottom view of a plate having interlocking engagement with the blade, and for attachment to the snath, according to this invention. The annular toothed rib on the scythe heel has a transverse slot, and on the opposite under face of the heel are rightangled recesses, in which fits the head of the bolt by which the seythe, with the interposed adjusting plate, is attached to the snath. The adjusting plate has a clutch surface for interlocking with the similar surface on the heel of the scythe, and at the other end of the plate is a transverse slot, with teeth at each side, the slot receiving a squared portion of a bolt by which the plate is locked upon the snath, which rests upon the upper face of the plate. By loosening the bolt at the heel of the scythe, the blade may be adjusted at any desired angle, the clutch of the adjusting plate being brought into proper registry with the clutch of the scythe heel, and the bolts holding the respective parts firmly in the desired position. By this construction also the heel of the seythe blade is materially strengthened.

Explosion of an Aerolite.

A large aerolite exploded above the city of Madrid, Spain, at 9:30 a. m., February 10. The explosion was accompanied by the vivid flash of light and a loud report; the buildings were shaken and many windows were shattered. The concussion was so severe that (the pressure adopted on said line). the partition wall of the United States legation building collapsed and nearly all of its windows were broken. The officials of the Madrid Observatory state that the explosion occurred 20 miles above the earth. A general panic prevailed in the city.

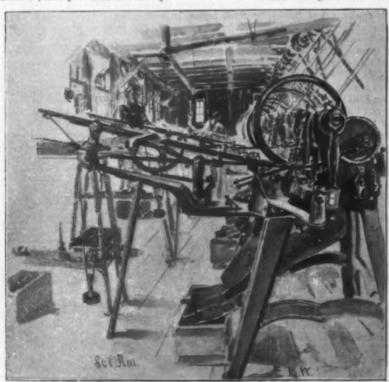

STRIPPING SHEETS FROM WHICH TACKS ARE MADE.

Coal Consumption on French Tramways.

Comparative figures of coal consumed per car mile run on French street railroads, employing different electric roads, by E. Cadiat, in the Portefeuille Economique des Machines of October and November of last

Storage Battery Traction.-On the lines at Paris from St. Denis to the Madeleine and from the Opera to Neuilly the car mileage aggregated in 1803 502,060, or per day 1,876 car miles. (The cars have room for 50 in this section, about the year 1820, according to the passengers.) The steam engines at St. Denis furnished memory of one of the oldest "tackers." for this service 250 horse power 28 hours and 125 horse power 6 hours, a total of 6,500 horse power hours, or 4 72 horse power hours per car mile. Mr. Badois, who reported these figures, gives 2.75 pounds of coal as the consumption per horse power hour, and arrives at 12 98 pounds of coal per car mile.

weeks of operation, 150,848 pounds coal were consumed to run 19,970 car miles, and during the second .two weeks 150,975 pounds for 19,983 car miles. The average is 7.78 pounds, which, however, includes the coal used in lighting the cars and the power station.

At Havre the following figures were obtained during October and November, 1894. It took from 1°75 to 2 Lorse power hours to develop kilowatt hour; 128 kilowatt hours were consumed per car mile, or from 2.24 to 2.56 horse power hours, equivalent to about 6.72 pounds of coal. The cars have room for 50 passengers.

At Milan, with cars having room for 34 passengers, 0.88 to 0.91 kilowatt hour, or 16 to 176 engine horse power hour, or 4.6 pounds to 50 pounds of coal produce one car mile. (From a paper by M. De Marchena.)

Compressed Air Traction.-The line at Nogent-sur-Marne has grades of 4, 45, 58, and 62 per cent. The cars have room for 50 passengers. Mr. Badois made a test from October 20 to November 4, 1804, and found 345 pounds of compressed air consumed per car mile.

To arrive at the corresponding coal consumption, Cadiat makes the following considerations: In an engine, as there used, from 100 to 150 horse power, 17.6 pounds of steam will develop a horse power. One horse power delivered to an air compressor of good design will produce 10 pounds of compressed air at 600 pounds per square inch

Expressed in steam, the expenditure is, there-small piece of iron) was held, while with a hammer he fore, $34.5 + 10 \times 17.6 = 60.7$ pounds, to which he adds for a certain loss, and arrives at 66 pounds of steam consumed per car mile, which, he states, can be generated in best French boilers with

48 pounds to 55 pounds of coal.

Lactates for Electro-plating Baths.

Metallic lactates are strongly commended to electro platers by Dr. Jordis, in a communication made to the German Electro-Chemical Society. He affirms that lactic acid affords an excellent solvent in electro-plating baths, and yields good, adherent metallic deposits. He reports that he has ings of copper and brass, of varying shades, on iron, shoe manufacture. zine, and copper; of zine on iron and copper; and of iron on nickel. Silver lactate yields a pure white coating of silver on ameltakes a high polish.

PREPARATIONS are in

THE MANUFACTURE OF TACKS

In many villages and towns of southeastern Massa chusetts, the manufacture of tacks, or "tacking," as methods of propulsion, are contained in an article on it is termed, is one of the foremost industries. Abington, Whitman, Taunton, Middleboro, Plymouth, Kingston and other adjacent places furnish a greater part of the supply.

In Kingston much of the earliest work in this line was done, and here the first machine for making tacks was invented. The manufacture of tacks was begun Like all first products, they were rudely made.

At intervals, through the countryside an old man traveled from house to house, much as did the tinware man, and peddled tacks. This old fellow, a native of Taunton, named Albert Field, made his tacks by hand, using a vise and dies, and with a clamp so ar-Trolley .- At Marseilles, during the first two ranged that by pressing with his foot, the blank (a



BURNISHING TACKS IN THE "TUMBLER."

fashioned the tack.

The inventive faculty of the Yankee found a field in making tacks, and soon a machine was invented in Kingston, by one named Reed. This contrivance cut a beadless sort of tack. Melborne Curtis, of Middleboro, then invented a machine having a lever attachment, which headed the tack. About 1840 an improved machine, called the Blanchard, came into general use. About fifteen years ago, steel was tried. This was domestic steel, manufactured in Pennsylvania, Virginia and Ohio.

The majority of shoe tacks are cut from Bessemer steel. Shoe tacks have been used only about fortythree years, the first having been made in Whitman, by H. H. Brigham and Deacon Cook. These tacks are fine, with small heads, so that the awls and other sharp tools used by the shoemakers cannot be greatly injured by contact.

The machine tack is finely pointed, quickly forced into leather, and remains standing firmly until driven. To test the point, a tack is pressed into the thumb succeeded in obtaining nail of the "tacker," when if it penetrates and stands from lactate baths, coat- easily, it is considered all right. Twenty five or more different varieties of shoe tacks and nails are used for

> Among the many styles are the roundhead, flathead, brass, countersunk, shankhead and lasting, while new styles are constantly being made.

A large supply of tacks is exported. Quantities go to England. South America, Australia, France and gamated brass, which Germany. The sheets of rolled steel come in bundles, usually thirty-six by twenty inches.

When ready to be used, a workman called a "scaler" takes these sheets one by one, and puts them progress at Glasgow Uni- into a vat of vitrol, which removes the scales. When versity for celebrating the scale is removed, the plate is washed in water, and Lord Kelvin's fifty years' dipped into a bath of lime or white wash, which neuconnection with that body. tralizes the acid. Another workman passes the sheets er strips twenty inches long.

e man in charge of the line of machines then goes one to another, placing in the end of a long woodaft one of these strips. The steel strip is forced work, and in this way be could frequently more than of the vast majority only the idea of a military officer.

n arrangement for feeding it into jaw-like aperture, where a tack is kly bitten from it, headed and ped beneath, where it makes one of v others already received in a box, h when full is replaced by another. each revolution of the machine one to k is made, and two hundred and enty in a minute.

the tacks are then poured by the be youl into another machine called the "rattler" or "tumbler," whereupon the tacks are "rattled" about thoroughly, and an air blast forces out the dust of lime, while the friction caused by their contact with each other gives them a peruliar luster; black lead is also used with them as a factor in the burnishing process.

They are then taken to the "sifter," an ingenious but simple machine for sorting them. A boxful is poured into a hopper at the head of the "sifter," and passes down into a slowly revolving, perforated cylinder, which is set at an incline. This is punctured with narrow and quite long holes, too narrow for a headed tack to go through. Down this cylinder the tacks slowly sift. Those that are perfect drop into a box. The imperfect ones, either headless or too small, drop through the perforations into receiving waste boxes.

In the packing room young women put the tacks into pound packages. An experienced energetic girl can pack sixteen hundred pounds a day, which is considered good work, as the average is ten hundred.

The Pioneer Technical Schools.

In an address before the Engineering Association of the South, delivered at the annual meeting at Nashville, Tenn., on November 4 of last year, President Dudley gave a deal of information upon the early history of technical training. His subject was the "Development of Technical Education in the United States," and we are indebted to the Inland Architect and News Record for the following notes:

The first school in the United States to give a course of engineering was the United States Military Academy at West The first two students who


gineers in this country until 1840, when the Rensse-

The Rensselaer Polytechnic Institute was founded in 1824 by Stephen Van Rensselaer as a "School of Theoretical and Applied Science." In 1849 it was reorganized as a general polytechnic institute, and it still devotes itself to civil engineering, dividing the course into general and sanitary engineering.

The total number of engineering schools or schools giving engineering degrees, in 1889, was ninety-four. Previous to 1802 engineers were selftaught, and from 1802 they were either trained in the office of some engineer or graduated at West Point.


Until recently in New England, and at present in old England, "students" pupils were apprenticed, so to speak, to practicing engineers. This custom, however, has never prevailed to any very great extent in the West. No articles were signed by the "pupil," but he was supposed to pay \$100 per year for three years to the engineer in whose office be was serving, and he

the jaws of a great machine which cuts them into was paid 121/2 cents per hour for his work in the field, which was credited on his tuition account, "After the war" this system began to die out, and the pupil was paid 121/2 cents for his office work as well as field

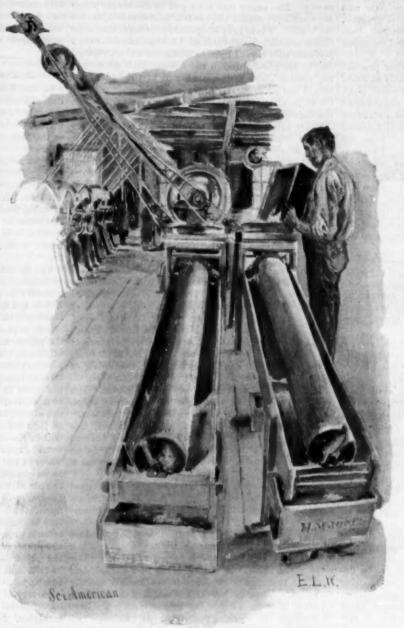

CUTTING TACKS 270 A MINUTE.

graduated as engineers graduated there in 1802. The pay his tuition. This, however, did not cause any loss name for the capital of Belgium, says the Nautical military academy continued to graduate the only en- to his "instructor," because his services were charged Magazine. The burgomaster signed a decree to this at a rate of from \$2 to \$6 per day, according to the effect at the beginning of last month in anticipation of laer Polytechnic Institute graduated its first class of skill of the pupil. By this system the pupil learned the contemplated ship canal. The present waterway thirteen civil engineers, being the first graduates in much or little, as he chose. He asked such questions by means of the Scheldt and the Rupel and Willecivil engineering in any English speaking country. as he pleased, and got such answers as he could, but brock Canal is 200 years old. The contract for this

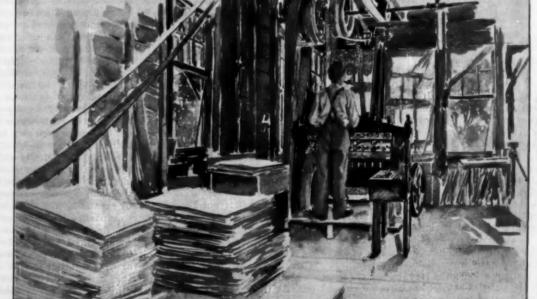

REMOVING SCALE PROM THE SHEETS IN MAKING TACKS.

what he learned he usually learned well, because he put into practice immediately and constantly what he learned.

Up to 1890 the word engineer conveyed to the minds

The phrase civil engineer had been but lately coined. In 1828 the Institution of Civil Engineers was incorporated in England, and when civilians assumed the title they incurred the wrath of the military men. In 1835 the Reusselaer Institute first resolved to form a distinct "engineering corps," receiving on graduation the "Rensselaer Degree of Civil Engineer." As we have seen, their first class graduated in 1840.

The School of Engineering of Union College, at Schenectady, New York, founded in 1845, was the second in the United States. The third was the Lawrence Scientific School, at Harvard, founded in 1846. The fourth, the Sheffield Scientific School, at Yale, founded in 1847, nominally, but was not a live and active school until 1861. The fifth was the engineering department of the University of Michigan, founded in 1852. The sixth, the Brooklyn Polytechnic Institute, founded nominally in 1845, but did not begin graduating until 1866. The Columbia College School of Mines was founded in 1868 and opened in 1864. It was the first school in the United States in which mining was taught as a science. Here the college course in mining engineering started in the United States.

The Massachusetts Institute of Technology was incorporated in 1861 and began operations in 1865. In 1868 the first class, composed of thirteen, graduated.

The first degrees in mechanical engineering were conferred in 1868 by three institutions-Rensselaer conferring five, Yale one and Massachusetts Institute of Technology one.

Stevens Institute was founded in 1870; its electrical course was instituted in 1880. Sibley College, Cornell, was founded in 1870. The first civil engineering degree was given in 1871. In 1875 the course in electrical engineering was instituted, as well as a course in marine engineering.

The latest course in engineering is chemical engineering, which is given at the Massachusetts Institute of Technology.

Brussels a Scaport.

"Bruxelles Port de Mer" is the new

enlargement has now been signed and will provide for navigation by vessels carrying 2,000 tons. will be a depth of 211/4 feet, obtained not by dredging but by raising the water level, and there will be three locks. Although provisions are made in the stone works for the above named depth it is not contemplated to exceed a depth of 181/2 feet at first. The waterway is to be finished in five years, and the estimated cost is £14,000,-000. At present the sea traffic of Brussels is not very extensive.

MINING SCHOOLS IN Russia. - The Russian Ministry of Public Instruction has decided to establish mining schools on a large scale in the mining districts, especially in the province of Ekaterineslav. The school will cover all branches of the subject, and the idea will be followed up to a considerable development if the results are sufficiently encouraging.

Electric Heat in Dental Practice.

BY DE. LEVITT E. CUSTER, B.S., D.D.S., EN THE SOUTHERN DENTAL JOURNAL.

Electric heat, when obtained by heating a conductor that does not oxidize, differs from other forms of heat in that it is without gas, noise, or odor, and on that account is of special value in dental practice. Electric heat also differs from that obtained from other sources in that it can be controlled and regulated with the utmost precision.

No case in dental practice, or in any other practice for that matter, calls for a blast of air exactly at blood temperature, so much as an almost exposed pulp. And no instrument so nearly meets this requirement as the electric warm air blast. With air at a constant pressure, which is carried over electrically heated wires at a constant heat, the air escapes from the syringe nozzle at a uniform temperature. The heat can be varied by the operator in three ways: by manipulating the air pressure, by altering the electric heat by means of the rheostat, or by varying the distance of the syringe point from the cavity. After a little experience, the operator can dry out the cavity without the slightest pain to the patient, and, if the air has passed through a wash bottle of alcohol or any such agent, it carries its vapor with it.

The cautery and electric root drier are both familiar to you, and are examples, on a small scale, of the heating power of electricity. These instruments can both be successfully operated on the Edison current by throwing in about ten ohms resistance and taking off the cautery heat by what is known as a "shunt" cur-

The value of any heat for sterilization is duly recognized, and for some time I have been satisfactorily withdrawing the temper of the instrument. The heat may be maintained all day long, and the cleanliness and simplicity recommend it. Gutta percha is softened with accuracy, when placed on a soapstone slab resting on the oven, and the waste heat rising from the whole appliance is utilized for keeping water warm for the syringe.

There are two processes in dental practice which call for absolute purity and uniformity of heat. Upon recognizing the special fitness of electricity for meeting these conditions, I some years ago devised an appliance for annealing gold thereby, and one more recent-

ly for fusing porcelain.

The heat produced by electrically heating a mat of coiled platinum wire is the cleanest, most uniform, and most accurately controlled of all forms of heat. The cohesive property of pure gold is supposed to be developed by heating to such a temperature as to drive off the gases condensed upon its surface, principal of obtained. When the operator is satisfied that there is which is ammonia. The alcohol and Bunsen flame are ordinarily used for this purpose, but who is certain that better results may not be obtained by subjecting to a heat free from the products of combustion as well as to the danger of smoking and the exposure to unconsumed gases. The electric annealer effectnally overcomes these dangers. The heat, being derived from electrically heated platinum, itself a noble metal, is absolutely free from gas of any kind. The heat is radiated from a mat of platinum coils and is quite uniform at all parts, so that the gold is not only I throw on two or three buttons at a time, according thoroughly annealed, but is evenly annealed. It is impossible to evenly heat a piece of gold, held with a pair of pliers, over a flame of any kind. The thin edges of the gold will be fused, while the part between the pliers will be scarcely warm. The accuracy with which electric heat can be controlled also recommends its use for annealing. By means of the rheostat, any degree of heat to the melting point of platinum may be obtained. From my experience with the electric annealer, however, I find that cohesion is developed at a much lower degree than at first supposed. It is never necessary to heat evan to redness, let alone fusion. The heat may be so low that the gold may be subjected to it for hours or for days, even, without any injury, and still be highly cohesive.

Electrically annealing gold saves time in many ways, The gold requires no attention, is ready for use at all times, and the heat not being high enough to take the temper from the plugger point, this instrument may be used to pick up the gold, thus saving the time of changing instruments. After six years' use, I am free the quantity of heat or the general appearance of the

the electric gold annealer

The latest practical application of electric heat in dental practice is the electric oven for fusing porcelain. From the time of Allen and Hunter, or from the very beginning of porcelain work, the question of heat has been a serious one, and the principal reason that continuous gum has not been more popular is the difficulty and uncertainty in the production of heat. The heating principle of the oven is an electrically heated platino-iridium wire, or the gold annealer in the form of an oven. In using this new source of heat, I departed from the old muffled shaped oven to one more in keeping with this new agent. It consists of an upper gradually cool. and lower section, flask shaped, with an inner cavity amply large enough to contain a set of teeth, and of we could ask for, and yet I am forced to say that the proved, including the fortifications on Puget Sound.

and yet to radiate its beat directly into the oven cavity. The upper half is hirged to the lower, which automatically makes the electric connection upon being closed. There are two openings through which the fusing process may be watched. These are placed at such positions that rays of light entering one will be reflected out by the plate through the other. This overcomes the intense glare of the heat, and at the same time brings the plate clearly into view, making it possible for an inexperienced operator to accurately determine the degree of fusion.

There are many other advantages offered by the

electric oven.

The source of heat being a noble metal electrically heated, it will be readily seen that a heat is obtained that is unlike any heretofore used for this purpose; and since it gives rise to no product: of combustion, it is an impossibility to produce what is known as 'gassing.' and porcelain fused by this method not only possesses unusual clearness, but appears to be more dense.

We can control electricity, and the opportunity is now open for any number of automatic appliances to ing. regulate the heat according to the porcelain treated. I have, up to this time, devised a clock attachment to the rheostat whereby the current is gradually raised and cut off at a set time. Second, a fusible button of porcelain placed in the oven at the time of fusing, which rings a bell when the porcelain fuses. Third, an electric thermometer, whereby the temperature of the oven is quite accurately told by the rise of mercury using the electric oven, raised not quite to the beat of in the tube. And fourth, an ammeter, the swing of whose arm is in proportion to the heat of the oven.

The cost of operating is very small indeed. The oven, as now made, consumes six amperes, which would be about two cents per fuse of thirty minutes.

In case a wire should burn out by accident, this break in the current automatically cuts the current off, so that no further damage is done, and it requires but a few minutes to repair the break in a way that is as good as new.

While the electric oven operates best when used on the Edison current, it is still very satisfactory on allowance of 0 06 for each degree of change. As this the 52 volt alternating, the 220 or the 500 volt currents.

In the practical operation of the oven the procedure is very simple. The case is placed on the tray in the the first form of air thermometer which was used by lower section, and the upper is then closed down. The lever of the rheostat is placed on the first button, and in 1596, and it was the study of the fluctuations of heat for thoroughly drying out the case is quickly no more moisture present, he begins raising the heat by pushing the lever to the right. If he allows two minutes to each button, it will require from twenty to twenty-five minutes to reach the fusing point. If it is ture correctly to within a degree, he will find it best to a crewn or bridge, less time may be consumed in raising the heat without danger to the case, and it may fused in from ten to fifteen minutes by throwing the lever over more rapidly. In practice I do not even measure off the time to each button, but fuse while I am operating. From time to time, as it occurs to me, as the interval has been, until I have reached the third from the last button, on which it is allowed to remain until I have three minutes in which to give it my undivided attention. The porcelain is just ready to drop into a fuse, and upon throwing on the last button the successive stages and degrees of fusion are clearly made out.

In the first stage the porcelain is still in the powder drop into a fuse, and the snow-like appearance changes into a dead, indistinguishable mass; the particles are now beginning to coalesce; gradually the surface, with all its inequalities, comes clearly into view, and presents a glistening appearance; continuing the heat a moment longer, the porcelain becomes more liquid, and the inequalities of the surface assume a more even appearance. Since the eye can be brought so close to the plate with the electric oven, and since the plate is brought clearly to view by the arrangement of the two sight openings, the operator is not guessing by to say that next in usefulness to the dental engine is plate, but he is actually observing the different partifineness of his fusing is always assured, and under his in closed or open jars of water, formed what are known perfect control. When the desired heat has been ob- as the Florentine and the Stuttgart experiments with tained, the lever of the rheostat si thrown back, which cuts the current off. At that very instant the heat exhibited were widely discussed by Europeans in the begins to go down; so that there is neither overfusing seventeenth century .-- Monthly Weather Review. nor loss of brilliancy in the gum color. If it is the first or second baking of the case, the stoppers need not be inserted, and the case can be taken out in a short time: but if it is the last fusing, after a few moments' time has clapsed and the case has become a dull red, the has stated that about \$59,000,000 would be required to stoppers should be inserted, and the case allowed to

It would seem that electricity has given us all that

such form and arrangement of the wires that all parts properties and applications of electricity are just unreceive the same degree of heat. Upon the whole folding, and the demands of dental practice of the fuinner surface is embedded the electric conductor, just ture will keep pace with, if not in the lead of, electric deep enough to be supported while so highly heated, progress. It is not a dream when I say the time is coming when electricity will have its place on the dental curriculum as much so as materia medica or metallurgy has now. No profession, science, or art has such varied demands in its practice as dentistry, and no single agent more nearly meets these than electricity.

A Convenient Homemade Barometer,

In the Weather and Crops, published by the Illinois State Weather Service, we find a short description of a simple instrument that serves the purpose of showing approximately the changes that may be going on in the pressure of the air. The description reads as follows:

"If a large-mouthed glass jar-fruit or pickle jar will do-be filled about two-thirds full of water, and in it be placed, inverted, a smaller long-necked flask, with mouth entering the water, the increasing or decreasing pressure of the outer atmosphere will cause the water to rise or fall within the flask. Clear, fine weather will be foretold by the water rising in the flask; stormy, wet, or bad weather by the water fall-

The device thus explained will, undoubtedly, show variations in atmospheric pressure, and all the more correctly in proportion as the temperature of the air within the flask remains stationary. If we wish to be at all accurate, or if we wish not to be misled by the effects of changes of temperature, we must either keep the temperature constant or else make a numerical allowance for the effect of its variations. If the temperature within the flask rises 1 degree Fahrenheit. its confined air will expand by 455 of its volume, and the water in the neck of the flask will be pushed down to a corresponding amount. On the other hand, if the atmospheric pressure should diminish by 0 06 of an inch below a normal pressure of 30 inches, the air within the flask being slightly relieved of its pressure would expand by the The part of its volume, and the water in the neck pushed down as before. In so far as we cannot rely upon the constant temperature of the air within the flask, we must therefore make an apparatus is so sensitive to temperature, it may therefore be considered as a thermometer when the atmospheric pressure is constant. In fact, this is known as the physician Sanctorius, who learned it from Galileo this apparatus that contributed greatly toward the discovery of the pressure of the air and the invention of mercurial barometers and the ordinary spirit thermometer. If one wishes to use this apparatus as a barometer, and needs, therefore, to know its temperafasten the smaller flask and its long neck, or, still better, a long glass tube, permanently within the outer glass jar and fill the latter with water so that the whole flask is covered. A thermometer whose bulb is under the water will give the temperature of the water and the air within it, and, if the water be well stirred, all will have the same temperature.

An early modification of this simple barometer was for a long time manufactured by expert glass blowers in Florence, and was called the Florentine experiment. In this arrangement the inverted flask was made quite small, and weighted so that it floated freely like a small balloon in a jar of water; when the temperature of the water rose, or when the atmospheric pressure diminished, the air within the flask expanded and the form, and appears like snow; presently if begins to density of the balloon diminished, so that it rose to the surface. If, however, the glass flasks are hermetically sealed so that the air within them cannot expand and change their density to any extent, then, if the water in the jar becomes warmer, the flasks will descend, because their own density will then be greater than that of the water. If, again, the open mouth of the jar be hermetically sealed, inclosing air above the water, we have a new condition, viz., the external atmospheric pressure has no longer any influence, while the changes of temperature have a twofold influence: by expanding the water its density is diminished, but by expanding the air above the water the quasi-atmospheric pressure within the jar is increased. These four of the porcelain itself; and for that reason the combinations, namely, closed or open flasks floating the Cartesian divers, and the phenomena that they

Our Needs for Coast Defense,

Gen. D. W. Flagler, Chief of Ordnance, has appeared before the Committee on Coast Defenses and furnish the guns, mortars, and all that is required by the Ordnance Bureau to complete the defenses of the twenty-eight ports for which projects have been ap-

I E UNDERGROUND TROLLEY STREET BAIL AY IN through these pass copper conductors insulated with NEW, YORK CITY.

the Metropolitan Traction Company, of this city, ther and installed an underground trolley system occurs at this point. part of its line, with the double view of workth by electricity and of extending it in the near rure to other portions of their line.

For some reason the idea of an underground trolley stem has been considered almost impracticable. p to the present time the Buda-Pesth road and a short e known as the Port Rush road, near the Giant's ave actually employed an underground electric trolv successfully for any length of time. Great diffiity has been feared from the entrance of dirt, noisture, snow, etc., into the conduit, destroying usulation, bringing about the formation of ares, and involving other troubles. So true is this that a number of ingenious systems for avoiding these troumore or less success experimentally, although they, naturally, are more complicated than the simple open The Metropolitan Traction Company has adopted the system of the General Electric Company, which is distinguished by great simplicity, dependence being placed more upon perfection of construction than upon any especial design for its protection from interference with its general working qualities. The conduit proper is of the typical construction used lowed with the object of supplying a conduit for a or undesirable. Through the conduit on each side the contact bars are carried by hangers. The contact bars are connected laterally with feeder wires placed just under the outer shoulder of the iron casting. In the more recent portions of the installation, the feeder bar is a wrought iron pipe 11/2 inches interior diameter and 2 inches exterior diameter. The pipe is inserted in 30 foot lengths and bonded at the ends with copper wire connections, bolted into the hanger the parts of the electric system very clearly. slots. These pipes can be seen in our view of the cross and longitudinal section of the conduit and also in Figs. 2 and &

The hangers, of one of which we give a section, Fig. 2, depend upon a porcelain cup for their insulation, which cup is corrugated inside and out, and sits into a correspondingly corrugated cast iron cup, receiving in its central aperture the iron hanger rod, all being secured together by cement. To the lower end of the hanger rod a socket is bolted, and to this the pipe, in its turn, is bolted, the end of the bolt in the pipe passing through a slot 1% inches long in order to provide for expansion and contraction by heat and cold. The head of the bolt is so shaped that it can be introduced into the slot, when by a revolution of 90° the bolt is secured to the pipe as shown in our cut. Fig. 8. The hanger bar is 11/2 inches thick and 9 inches long, and the lower semicircular socket is attached to it by a swivel joint. This is the construction practically settled upon definitely, subject of course to minor changes if anything better can be evolved.

The electrical contact apparatus, termed the "plow," steel, with wood and fiber insulation, its form genseen how accurately the plow has to be constructed to thickness, giving a clearance of a little over 1/6 of an pute." inch on each side. To construct the shank two sheets of steel 1/8 of an inch thick are bolted together, and in the center and at the ends a central shoulder and end pieces are inserted for keeping them 1/2 inch apart, thus providing two passages between them of this width and 3 inches long going all the way down. This shank is 91/4 inches wide, and descends well into the conduit. On each side of the lower portion of the necessarily exacting conditions laid down by the the shank are carried the contact shoes, which are trade. seen in various views in our cut, especially in Fig. 5. These are castings, each being 41/4 inches by 21/4 inches, bolts, wooden blocks and fiber sheet being used to in- a delay of weeks or months." sulate them from the plow frame.

The exact disposition of these parts is seen in Fig. 5, The springs are held in place by compression and by the hooked upper end, which enters a mortise in the his invention is expected to meet. As the matter wooden block. The fiber sheet is shown directly back stands, it is difficult for him to tell just exactly what or to the right of the detached spring. The same cut the requirements of the trade are. He is informed: shows a heavy sheet of fiber descending down from the plow shank and between the springs to prevent any materially changed. possibility of a short circuit. We have spoken of the "Another tells him channels that extend through the shank of the plow; tion, provided the result is accomplished.

mica and tape wrapping (Fig. 5), one conductor for each contact shoe. Between the ends of the conductors ving organized and put in operation their highly and the shoes the connection is made by safety fuses, veloped cable traction system, has now gone a step so that if too much current is put on, the burning out

At the present writing the system cannot be called the portion of the road now equipped there-experimental in the usual sense, as it has operated with uniform success for nearly an entire winter, as well as during the less trying summer weather and the line is in daily operation and gives the greatest satisfaction. The Columbus and Lenox Avenue line is operated from a power house at 146th Street near Lenox Avenue. Here there are installed two multipolar auseway, in Ireland, are the only two roads which dynamos, class B, of the General Electric Company, which at one hundred revolutions give a pressure of 300 to 330 volts each with an output of 1,200 amperes, but in practice they have been speeded up to nearly 150 revolutions, raising the voltage to 525. For each dynamo there is installed a 1,000 horse power cross compound Allis engine with Corliss valve motion, exhausting into the open air. To supply the engines bles have been devised and have been operated with there are two Babcock & Wilcox boilers, each containing 100 four-inch tubes 18 feet long, with 42 inch drums 1/2 inch thick and 23 feet long and capable of working at 180 pounds. At present cars are run by electricity on this division from below One Hundred and Sixteenth Street on Columbus Avenue to Lenox Avenue and One Hundred and Forty-sixth Street, but ultimately it is proposed to extend the electric system to other roads in the city. The Eighth Avenue road is the next one of the old roads to be equipped. It for the cable roads. This construction has been fol- has been found that the conduits do not accumulate dirt, that the loss of current is not worse than on an cable if the electric system should prove unsuccessful overhead trolley, and the conduit has proved to be practically self-cleaning, requiring to be swept out perhaps two or three times in a year, the natural flushing of the rain doing the greater portion of the cleaning. It is made, of course, self-draining.

Fig. 4 is a cross section of the conduit drawn to illustrate the relation of the cable and electric systems. It shows where the working and idle cable in the cable traction system are situated, and gives the position of

Manholes are placed along the line, never less than 250 feet apart. At them are placed sewer connections for carrying off rain water. Over each insulator is a handhole beneath the street paving blocks easily reached by raising a few stones.

Each car is provided with two 25 horse power motors, with electric heaters and electric lamps, including headlight.

A very noticeable feature about the operation of the cars is their smoothness of operation. They start without the jerk which is so pronounced on the cable roads, and the extension of the system to other roads of the city will be a decided improvement on existing systems. The system is interesting also as not using a return grounded circuit, so that electrolysis of water and gas pipes will be avoided.

The Non-refillable Bottle.

Bonfort's Wine and Spirit Circular of January 10 contains an exhaustive article on the above vexed question from the pen of a writer who signs himself J. C. G. It opens with the remark that "for many years it is attached to the car body and is built up of sheet has been the general belief that there has been systematically practiced a fraudulent custom of substituterally being a parallelogram. When it is remembered ing an inferior grade of liquors in bottles originally that the slot itself is only % of an inch wide, it will be containing a superior brand, resulting detrimentally to its reputation, aside from probable serious financial correspond thereto in size. Its shank is 1/4 inch in loss to those whose output is deservedly in good re-

It is recognized by the trade that the only effective way to prevent this fraud is to provide some mechanical device within the bottle which shall make it practically impossible. A whole army of inventors have spent much time and money in the attempt to provide this in the vast majority of cases, the device may be conmuch-needed device; but at the present time there appears to be no such bottle in the market as meets all

"There have been so many devices submitted for approval, and invariably objected to for one reason or and ¾ of an inch thick. A single shoe is used on another, that the trade seems weary of being imeach side, although as many as three on a side have portuned, and it is gradually beginning to consider the been used experimentally. They are carried by sheet idea impracticable and to regard inventors as 'cranks;' steel springs 2% inches wide, which press them out- while the glass manufacturers, having been surfeited by two or more persons. Mr. R. S. Williamson's St. ward from the plow frame, as shown in Fig. 5. Under in the matter of making trial samples, are free to ad-Bernard, Lord Hatherton, a young dog born in Febthe influence of these springs they are pressed against mit they prefer not to be troubled by such work, and the conductors with a pressure of about 7 pounds. The pressure of about 7 pounds. The upper ends of the springs are clamped in place by they do it at their own convenience, which may mean

> It is necessary that the inventor, in seeking to pro vide a non-refillable bottle, should have a perfectly clear conception of every detail of the conditions which

"First, that the present shape of bottles must not be

"Another tells him that this is not a material objec-

"Second, if any liquid whatever may be introduced into the bottle it is fatal, as showing it may, in time,

"Another says if it takes ten or twelve hours to refill it, it is practicable.

"Third, the cost must not exceed one cent.

"Another says five cents.

"Fourth, a perfect device in all respects is easily destroyed by boring the bottle, refilling it, and stopping up the hole, which may be readily concealed.

"Another says that is no objection, as it would be quite as readily discovered as though a different bottle ere used. It would require an artist in the glass line to do it so cleverly as to avoid detection; and it is reasonable to suppose few, if any such, would be found in

"Fifth, it must be impossible to extract the device from the bottle.

"Another says, provided the effort to extract it shall shatter the device so that its reinsertion, as a whole, is rendered impossible, such broken condition, or its utter absence, would be patent indication of the attempt or fact-of refillment; especially after the public were aware that such a device had been adopted as part of the bottle."

It is pointed out that such contradiction is bewildering, and discourages invention at the very outset. The trade owes it to itself to "formulate certain qualifications," which may be easily recognized by inventors, and by which any new device shall be judged.

In regard to the change in the shape of the bottle, if it is the attractiveness of the particular bottle that sells the goods, the advantage gained does not warrant the change; but if it is the quality of the goods, it does.

If it will take not less than ten or twelve hours to refill a bottle, it is "practical as to that feature, because an appreciable percentage of substitution is occasioned by laziness," and the vast me jority would give up the practice if it consumed so much time.

The cost of the non-refillable bottle should not be measured by that of the ordinary kind. If its cost be anything less than the cost of the present bottles, plus the present loss due to their refilling, it is practical in regard to this feature.

As against the statement that it would be an easy matter to bore a hole in the bottle, refill it, and seal it up again, it is urged that :

"The easiest way to convince one's self that this obfection is an error is to take the necessary tools and bottles to any dealer, show him how to do it, and see how long it will be before he can do it so cleverly as to avoid ordinary observation. He would rather give up the practice of substitution. Now, whether such a hole were sealed with glass or by the paper label, it would be readily discoverable by agents; who, knowing that there was but one way to refill it, would always look carefully for such evidence; and, if found, it would be tangible evidence of the attempt at, or fact of, refillment."

The features which the trade demand as essential are summed up as follows:

First, the bottle must be made of a material that will in no way taint the liquid. This precludes metal, rubber, celluloid, leather, etc., and limits us practically to glass.

Second, its operative parts must be protected so that they may not be interfered with, or made inoperative by means of wire or other instruments.

Third, it must be impossible to refill the bottle by submersion, or by shaking it so as to disarrange its operative parts, or by forcing the liquid through the device by pressure within any reasonable time. Of course if it can be so constructed as to absolutely prevent the introduction of any liquid whatever by said means, it is most desirable; but if, on the other hand, it shall require such a length of time to successfully refill it as to preclude the probability of such attempts sidered meritorious; but it remains for the trade to express itself on this point.

Fourth, the exit of the contents must be comparatively free and not seriously impeded.

A \$2,350 Dog.

A record price for a dog was realized recently at the Birmingham Dog Show, at the customary sale by auction of dogs which had been claimed at catalogue price spirited bidding, the dog was disposed of for \$2,850 to Mr. Joseph Royle, of Manchester.

THE suspension bridge at Niagara Falls is to be replaced with a steel arch bridge, wholly contained within itself, which will consist of a main arch span 840 feet long and two shore spans, that on the American side to be 190 feet long and the span on the Canadian side 210 feet in length. The arch span will consist of an open parabolic rib 26 feet in depth, with a rise of 105 feet at the center. The roadway will be 46 feet in the

CHASE'S ELECTRIC CYCLORAMA.

Despite their artistic value and the great cleverness employed in their construction, the most beautiful panoramas have got beyond the limits of success. Ceding to the taste of the day, one has been converted into a circus, another into a skating rink and still another into a bicycle track.

The invention that we are about to describe in a general way seems destined, if the hopes of the inventor shall be justified, to bring panoramas into fashion again and to assure them, in the future, new success and a less ephemeral existence.

The idea of Mr. Chase, a resident of Chicago, who has been working several years in the improving of his apparatus, turns to account the most recent progress and discoveries in the way of panoramic photo graphy, projection apparatus, electric lighting, kinetoscopes, kinematographs and all other systems that permit of faithfully representing the phenomena of motion and life, as well as landscapes and views of inanimate objects.

The possibility of causing a large number of views to pass before the spectator within a very limited space of time, and of imparting life to them at will, gives a cyclorama a true animation and a remarkable diversity that is absolutely lacking in ordinary pano

Mr. Chase utilizes an ordinary panorama, but one in which the spectators stand upon the floor of a cylindrical chamber 100 feet in diameter and 30 in height, upon the walls of which are thrown photographs placed in a projection apparatus suspended from the center of the ceiling, after the manner of a chandelier.

In Fig. 1 we give a general view of the panorama as conceived by the inventor, and as it was realized upon a smaller scale in 1894, with experimental apparatus, at the Chicago Fire Cyclorama. Fig. 2 shows the projection apparatus in its entirety. Fig. 3 exhibits the mode of construction of the suspended platform upon which are situated the operator, the projection apparatus, their carriages and the electric lamps that light such apparatus.

It will be understood that nothing is more easy than to convert an ordinary panorama into an electric cyclorama. It suffices to paint the back canvas white and to suspend Mr. Chase's projection apparatus in the center of the hall.

The apparatus, suspended in the center of the panorama by a steel tube and guys of steel wire (Fig. 3), is 8 feet in diameter and 10 in height. The operator stands in the center upon a circular platform, and is surrounded by an annular table supporting eight carriages, upon which are mounted the projectors, lanterns, kinetoscopes, kinematographs and all the arrangements neces sary for imparting life to the scene and producing the transformations.

Each projector is supplied by a special electric lamp, and the conducting wires that lead the lar table carries the commutators and the rheostats made his first experiments at the Chicago Fire Cyclothrough which the light is regulated according to the effects to be produced.

The projectors are provided with iris diaphragms that permit of obtaining vanishing effects, and night, auroral or twilight ones. These projectors, eight in number, are double, thus permitting of the preparation of a view and focusing it while the spectators are effected until everything is

Very accurate regulations of the carriages that support the projectors permit of perfectly adjusting the views and of bringing them to a focus in order to obtain the continuity necessary for an illusion. The eight positive photographic views that produce a panorama 300 feet in circumference and over 30 in height are, together, about seven feet in length and eight inches in height.

well regulated.

The rays emanating from each of these projection apparatus are such that they erlap, did not a frame fixed to the lenses and carefully regulated once for all suppress those parts of the views that would encroach one upon another without such precaution.

When the immovable panorama is well regulated, it is possible at will to animate such or such a part by projecting upon it, through processes already applied under other circumstances, moving clouds, moon light effects, ships in motion, naval battles, etc.

Upon combining this apparatus with the Edison kinetoscope or the Lumiere kinematograph, it would be possible to impart life to a street by projecting upon it the passing of a procession, the march of a



Fig. 3.—PLATFORM FOR THE OPERATOR AND PRO-JECTION APPARATUS SUSPENDED IN THE CENTER OF THE HALL.




Fig. 2.-THE PROJECTION APPARATUS.

corrent pass through the suspension tube. The annu- regiment, etc. It was in August, 1894, that Mr. Chase rama. A panoramic photograph 4 inches in height and 32 in length was projected cycloramically upon a circular screen 156 feet in circumference and 15 in

According to the Western Electrician, from which most of these details are borrowed, this preliminary experiment, although crude and not carried out in home to bed, with the happy consciousness of having looking at another. The change of pictures is not adequate proportions, much surprised and in- all of us scored a success—author and actors and even

terested those whose privilege it was to be present

The Torrors of a First Night.

The Cornhill Magazine gives the following graphic account of the anxiety attending the introduction of a new play to a critical audience :

There is a passage outside our stage door, and there I go for a waik. It is perhaps fifty yards long, and up and down it I trudge like a convict taking exercise in a prison yard. The gallery door opens on to it, and higher up there is a slit for passing scenery through that looks down on to the stage. Some of the scene shifters stand there looking in; bot gusts of air and the voices of the actors rise up through it. But from the front of the house absolute silence; neither laughter nor applause, nor any sign of existence whatever. For any sound that rises, so far as I can judge at present, the third act might as well be played to empty benches. Up and down the passage I dolefully trudge, supported by one of the company who feels for my misery and apprehension. We talk gravely of everything but the piece; he tells me of his early career and struggles, and I listen sympathetically. I feel inclined to tell him something of mine, but conclude that after all he is seeing something of them for himself. Another joins us and observes solemnly, "I need scarcely tell you that your play depends entirely on its last act." I am much indebted to his penetration, I'm sure; I reply mournfully that I know that very well. Most plays do.

As the act draws to its close one or two people slink out of the gallery door. It's all over, I feel; let me go home and go to bed-let me try and forget I ever was mad enough to think the wretched thing was going to be a success. But my good friend takes me kindly by

the arm and says that the act is ending, and we had better go down on to the stage. Exactly like the chief and most inconsolable mourner at a funeral, I go down the stone stairs and shuffle along the sloping side of the stage among people who make way for me, and at whom I dare not look. I feel a hundred years old, a broken man, that I shall never get over it. I go to my old place at the wing, and find there the master carpenter, who is smiling. Very strange, but even as I go to my place I am at once conscious of the presence of the old grateful fluid sympathy and interest 1 felt so strongly during the first act. There it is back again, making the footlights burn the brighter, vivifying as with a gas the whole scene. I know instinctively by its presence that the last act is all right -that it has more than pulled us through, though at present the applause has not begun. As the curtain falls and is raised again and again, the master carpenter bends forward and listens. "That's all right, sir," he says confidently. "I've seen so many "That's all right, first nights, and always know when the applause is genuine. That's all right, sir; you take my word

for it." And so it seems, for the company are all called and I am called. I have a vision as I bow of a bouse that seems all in white standing up and clapping. It looks to me somehow like Martin's picture of "The Plains of Heaven," with all the long rows of angels. The applause continues when the curtain is finally lowered, and some one from the gallery calls "Spee eech !" No one responds to the invitation, and we are free to go

> the master carpenter. As I go home across Trafalgar Square in the clear still night I cannot help thinking of the many pens scribbling away at that moment in the newspaper offices, nor can I keep myself from speculating, with a certain sickening apprehensiveness, as to what they are all going to say. That is one of the many trials and terrors of the theater-that your first nights are never over. There is the terror of the play itself -whether it is going to succeed or not with the audience; then comes the fear of the morning papers, and then the evening, and then the weeklies, each bringing its own particular load of apprehension.

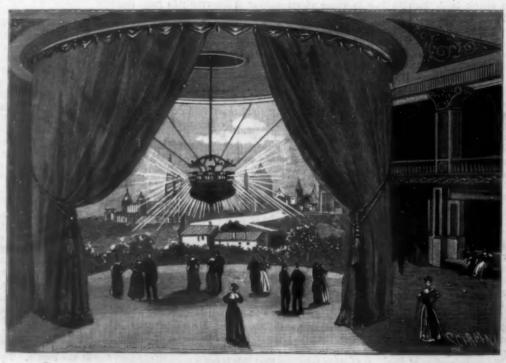


Fig. 1 .- GENERAL VIEW OF THE CHASE ELECTRIC CYCLORAMA.

DURING 1894, 8,815, patents relating to electricity were granted in Great Britain, the United States, and Germany. Of these 1,130 were British. being one-twentieth of all British patents, 1,704 were American, and 481 were German.

rie

TAYLOR'S LIFEBOAT.

It has been patented by W. aylor, of Narragansett Pier, H The boat is divided for its R. e length into two parts by the and centerboard box, the forof which extends from the botof the boat up to the second om or floor, the centerboard be extending still higher. By this division the boat, under the floor, is converted into two watertight partments, which are filled with airtight metallic tanks, all of which, except the tanks at the ends, are provided with caps screwing into collars in the floor of the boat. These tanks are adapted to be used for provisions, water, clothing, etc., and if need be, on naval vessels, with ammunition. This boat may be launched in any shape, as she quickly frees herself of water through valves in the sides of the centerboard box, and is therefore self righting and baling. The tanks answer also for the purpose of keeping the boat from sinking, if it should get stove. The centerboard box is strengthened by cast-

rods, while the metal centerboard, which is adapted to be readily raised and lowered, has vertical slots to correspond with the castings, making the entire construction very strong. The boat has been approved by the board of supervisors of steam vessels.


BAKU AND ITS OIL WELLS.

The accompanying engraving, for which we are indebted to Globus, gives us a very good idea of such a fire as sometimes occurs in the naplitha spring re-

is so great that every precaution is taken; smoking is prohibited, and the lamps used during night work are carefully closed, but in spite of all this there is an occasional conflagration. Some time ago a fountain of naphtha shot up suddenly, carrying with it many stones, which destroyed the electric lamps, and in a minute the whole column of naphtha, extending to the heavens. had taken fire. No earthly power can do anything to stop such a fire; water would only give fresh power to the flames. All day the clouds of thick, black smoke rose, covering everything in the neighborhood and making it seem like night, until the fire had devoured all that it could find to feed upon. The wooden planking over the excavations is covered with earth and sand to prevent such casualties.

The crude naphtha is carried from the reservoirs, the largest of which can hold 6,000,poods (216,000,000 pounds), in pipes to the Black City," where we find a whole forest smoking chimneys, The buildings, streets, trees, men and animals are covered with soot and smoke. The workshops and refineries extend far along the shore of the Caspian Sea.

The oil fields of which Baku has thus far been the principal center extend for a distance of 700 miles be-

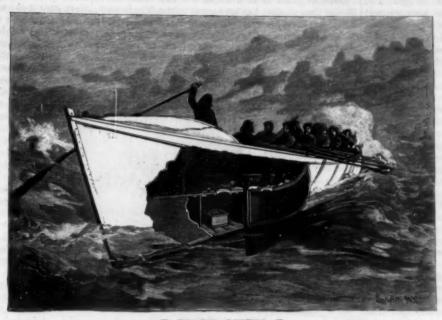

TAYLOR'S LIFEBOAT.

ings held by bolts passed through the keel and by stay duction in the same year in the United States being Russian supply, in face of an evident falling off of 50,000,000 barrels. Besides this the production from the American production, has been shown, and the other districts in Russia was considerable, the area or oil territory being officially estimated at 14,000 square There are also many evidences of oil and natural gas strata beneath the Caspian Sea, to the east of which the territory is rich in ozokerite, or natural important use as an insulator for electric wires.

most oil are all less than 800 feet deep, yielding oil gen- its employment when sufficiently cheap to replace gion near Baku. The danger of fire in this region erally in the form of a fountain or so that it may be coal, or in cases where liquid fuel can be more readily

tween the Black Sea and the Caspian, most of which baled out, and the wells are much larger, being somelifeboat shown in the illustration is intended has been but imperfectly explored, while only a small times of a surface diameter of 24 inches. The yield of especially in its construction and arrangements fraction of the known highly productive territory has some of these wells has been so enormous as to seem oring provisions, water and clothing, to be carbeen commercially worked. During 1894 the wells almost incredible. From one well sunk in 1886 the or use in case a vessel has to be abandoned at near Baku produced 38,000,000 barrels of oil, the pro- flow reached 2,750,000 gallons a day before it was con-

trolled by the engineers, on the fifteenth day, and from the largest well yet known, sunk in 1898, the flow for the first few days exceeded 4,000,000 gallons per day.


The Russian oil differs largely from the American oil, the latter producing about twice as much kerosene or lamp oil as the Russian, while the Russian oil in ordinary lamps gives a smoky flame. This, however, may be corrected by lamps designed especially for its consumption, and affording a more perfect supply of air to the flame. The residuum of the stills is also well adapted as fuel. All the oil produced in the Baku region for foreign use has now to be transported by rail to Batoum on the Black Sea, a distance of about 400 miles, and with railway facilities none of the best.

The relative capacity of the Russian and American supply was touched upon in a recent number of the London Engineering as fol-

"Now that the adequacy of the probability that ere long we must still further have to depend on Russia has been indicated, it is of importance to consider what steps should be taken by the Russian producers to render their oil more readily available to users in this country. For use as fuel, paraffin wax, which has within recent years found an the Russian astatki-the residuum from their stills after distilling off the light naphtha, lamp oil, and In the oil districts of Russia the wells yielding the lubricating oils-is sufficiently well known to insure

> used, but the principal field lies in the lamp oil, and the only means of insuring its use is the introduction of suitable lamps sufficiently easy to manage, and, above all, sufficiently low in price to bring them within the reach of the masses. Such an innovation is by no means impossible of realization. It was found possible in the sixtles, when American petroleum commenced to displace the colza and other oils which were previously in use, and would probably be still more simple at the present time, when less prejudice has to be overcome.

'The perfect organization of the American producers has hitherto had the effect of securing to them the principal markets of the world, and it would be difficult to organize another trust having anything like the wealth and power enjoyed by the Standard Oil Company of America. Even they, however, cannot control the market in the face of a constantly falling supply of the raw material, and a well arranged attempt on the part of the Russians could scarcely fail to give them a largely increased outlet for their enormous supply. Even the agreement which has so often been reported as about to be signed between these great rivals would be by no means a false step on the part of

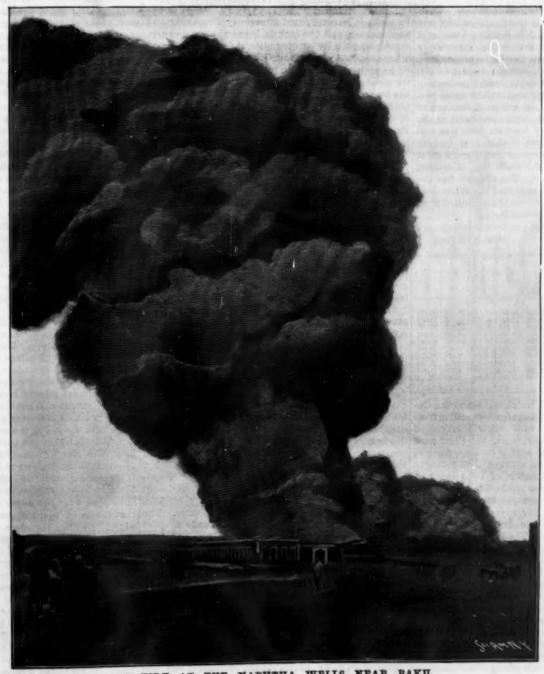

A FIRE AT THE NAPHTHA WELLS NEAR BAKU.

Transatiantic Passenger Traffic.

With steerage rates of 35s, to 49s, for the passage from this country to the States, and correspondingly low rates for the second class cabin berths, one would have expected a large accession to traffic in 1895. The official returns issued lately show an improvement on the abnormally low total of the previous year; but when comparison is made with normal years, the total of 96,558 cabin and 258,560 steerage passengers is found to be less in the one case by 25 per cent and in the other by 38 per cent. Five years ago there were 144,178 cabin and 371,593 steerage passengers, and in the following year-when the Chicago exhi bition was open-the numbers were still higher, but since then the totals have dropped, although, as we have said, there was in 1805 an improvement of 4,000 cabin and 70,000 steerage passengers on the figures of 1894. We must, therefore, assume that the inducement of low rates has been counteracted by the stringency of the immigration laws, perhaps, also, by the less satisfactory views entertained as to labor prospects in the immediate future in the States. Even two years' figures, however, cannot be taken as indicating any trend, and we must, therefore, confine our consideration to the steamship working. The reduction in passengers is mostly from the Continent, for the companies who have experienced distinct decreases are chiefly those sending ships occasionally from different ports. The regular liners have not suffered to the same extent. The withdrawal of the occasional emigrant steamer is shown by the fact that only 792 trips were made to New York in 1895, as compared with 879 in 1894 and 975 in 1893. Thus the number of cabin passengers per steamer last year was 122, as against 105 and 185 in the two previous years, while the number of steerage passengers per ship was 326, as against 214 and 874.

The revenue per ship might have been almost the same as two years ago had not rate cutting operated to the contrary. As to the relative positions of Liverpool and Southampton, the latter has increased its total cabin passengers from 35,203 in 1894 to 37,494 in 1895, due solely to the gain of the American Line. Liverpool has practically remained stationary, the cabin total of the Mersey ships for 1895 being 80,649. course the Southampton steamers include the few cabin passengers from Bremen and Hamburg. Both ports experienced a decrease on the figures of 1898, but the Liverpool recovery is less pronounced. Time and again it has been pointed out that the new steamer has the preference, and this is partly the reason why the American Line, with their new St. Paul and St. Louis, have increased their total in greater proportion than any other line, 2,586 cabin and 3,675 steerage passengers having been carried in excess of the total of 1894. They come within 2,700 cabin passengers of the Cunard total, although they have six trips less; and again, it should be remembered that four Cunard steamers are engaged for three American liners, a great difference in respect of capital. Each line, of course, must have a stand-by steamer. The Cunard top the list again, with the American next, and the White Star third; but figures will be more readily consulted if we tabulate the totals of the principal lines:

Line.	1806.		1804.		1895.	
	Cable.	Storagn.	Cultin.	Steerage,	Cabin.	Stoerage.
Cuisard	14,874 13,897 15,990 13,050 10,905 8,510 7,015	25,108 12,100 28,876 68,465 33,091 16,559 11,546 96,488 27,381 10,298	18,362 13,560 11,590 12,049 9,594 7,490 5,700 4,513 3,316 2,382	19,175 15,905 30,898 19,987 18,463 9,589 6,497 8,600 9,658 2,909	18,844 16,146 11,805 10,896 10,543 7,887 6,604 4,890 2,855 2,509	21,786 19,586 30,725 44,326 30,141 16,469 10,011 12,554 11,416 3, 19

The North German Lloyd, Hamburg-American, Cunard and Anchor Lines all have steamers sailing from the Mediterranean, which, with other Continental lines, bring up the total of emigrants, but these need not be referred to. It is interesting to note, further, that the Cunard ships, on an average, took 896 cabin and 388 steerage, the total number of trips being 56. The American Line steamers made 50 voyages and took 323 cabin and 392 steerage passengers each trip. and water with same result. He used three kilo-This is 40 cabin pa ngers per voyage more than in the previous year. The White Star took 231 cabin and 603 steerage passengers. The latter company has always had a large company of emigrants in their ships, as the table suggests. The French steamers made 54 voyages, taking 140 cabin and 305 steerage passengers per ship; and the Hamburg-American 98 voyages, taking 118 cabin and 324 steerage passengers; and the North German Lloyd 130 voyages, the averages being 88 and 841 respectively. But in the last two instances it should be stated that intermediate steamers are frequently sent carrying only emigrants, so that while the number of emigrants per ship compares favorably with British ships, the number of cabin passengers is necessarily less. Of cabin passen- \$130,000 a month.

gers 40 per cent were carried by British-owned steamers and 30 per cent of the emigrants.- Engineering.

The New East River Bridge.

Chief Engineer L L Buck, of the new East River Bridge Commission, has forwarded to the War Department, at Washington, for approval the preliminary data of the proposed bridge, showing the clear height above mean tide and the encroachment of the piers upon the river. On the Williamsburg side the bridge will land about two blocks above the present Broadway Ferry house, and on the New York side the approach will be between Broome and Delancey Streets. Mr. Buck's report to the commissioners, which was adopted on January 29, favors a six track bridge, with two elevated tracks in the middle and two trolley tracks on either side. The total width is to be 118 feet, and to accommodate the roadway and walks it will be necessary to place them over the railways instead of on the outside of the trusses, as originally proposed. Mr. Buck thinks this can be done without exceeding a live load of 10,000 pounds per linear foot, but he will the working of this new invention. raise this amount by 20 per cent to provide for future contingencies. The scheme contemplates a loop terminal at each end for the car lines.

It is suggested that the park commissioners and other interested parties be requested to "co-operate in the removal of all buildings for the length of the bridge approaches, for the purpose of making small parks of the land not occupied by these approaches."

It is calculated, as regards the trolley lines, to run the cars across the bridge singly or in trains made up of a motor car followed by three or four trailers.

As soon as the general plans sent to the war office have been approved, the full working details of the bridge will be prepared.

Preservation of the Palisades.

The most magnificent piece of natural scenery near New York is the Palisades of the Hudson River. For its west bank by a wall of solid rock varying from 250 to 550 feet in height, to which the name Palisades has long been applied. The cliffs rise from a narrow shore at the river's edge, and from their summit the ground gradually descends to the westward toward the valley of the Hackensack. The material of the Palisades is traprock, used extensively for paving and road making, and the rock is being thrown down in great quantities by blasting; is sold for municipal and other uses. A special commission has been appointed to propose measures to prevent the destruction of the great cliffs, and, as a result of their efforts, a bill has been presented in the House of Representatives authorizing the purchase by the Federal government of ten thousand acres of land along the edge of the Palisades, and corresponding bills have been passed by the legislatures of the States of New York and New Jersey, ceding the jurisdiction over this ground to the United States government.

In preserving the Palisades, the Federal government will merely perform another act in its character of preserver of objects of national interest, such as the Yellowstone National Park, Gettysburg and other battle fields of the civil war. The region along the edge of the mighty cliffs can be made a park of surpassing beauty. At Niagara Falls there is a State reservation on the American side and a correspondingly protected portion held by the Canadian government on the Canadian shores to protect the Falls from

As regards practical availability of the region, it is the other conductibility. provided that it shall be open to the use of the State militias of New York and of New Jersey.

Soapsuds on the Waves.

Some experiments have recently been made, says Railroad Gazette, which show that soapsuds will reduce a sea almost as well as oil. This was first tried on the Scandia, an English steamer, in a storm on the Atlantic. Having no great quantity of oil, the master dissolved a large quantity of soap in water, which was discharged over the bow. The effect was nearly instantaneous, the height of waves being so diminished that the vessel could be managed without difficulty. Captain Le Gall. of the French steamer Sénégal, sailgrammes of soap dissolved in 70 liters of water. The solution when dripped over the bow made a quiet space about 10 meters wide, preventing the waves from breaking over the vessel.

A CONTEMPORARY makes the statement that the greatest corporation on earth is the London and Northwestern Railway Company, of England, capital of \$595,000,000 and a revenue of \$6,500 an hour; has 2,300 engines, and employs 60,000 men. Everything is made by the company-bridges, engines, rails, carriages, wagons, and an innumerable lot of other things; even the coal scuttles and wooden limbs for the injured of its staff. Repairs to the permanent way cost

Prof. Herkomer's New Art.

On the afternoon of January 28, at the rooms of the Fine Art Society, in London, Prof. Herkomer, R.A., gave a demonstration and explanation of his "New Black and White Art," says the Evening Post. Prof. Herkomer spoke as follows:

The black and white art, which I now present to painter and public, is new from nearly all points of view. It is patented under the definition of "an improvement in artistic printing surfaces," and not the least part of the novelty lies in the fact that this "printing surface" is the result of a peculiar treatment of an artist's painted handiwork. Thus, probably for the first time, the painter has it in his power to do black and white work, diffusible by the printing press, without departing from his accustomed methods of work, for I give him "paint" to manipulate with the "brush." He has no new technicalities to acquire, such as are needed for the production of various forms of engraving-technicalities that have hindered many an artist from taking to "plate work." I will describe

First, then, on the polished surface of a copper plate, which is coated with silver, the artist paints his picture with a thick black pigment resembling printer's ink. In the production of this painting he uses brushes, leathers, stumps, dabbers, pointed bits of wood, his finger tip, or anything, in fact, that will enable him to get the desired effect. So far, you will note, it is a positive process, requiring, therefore, no reversion of the subject on the plate-an inestimable boon to the artist. Although the further development of the process requires that the ink shall remain wet, the artist need in no way hurry himself, as the ink I have invented for this method of work practically never dries. But I rather think the artist will rely on rapidity of work for success, as he will find response to the touch so very perfect. On examination of the painted plate, it will be seen that the ink is on the surface in different degrees of thickness. In this variety of depth in a distance of fourteen miles, the river is bordered on the ink lies the first vital point of the invention. The artist need in no way think of this necessary condition; it comes without conscious effort in the mak-

ing of his tones and gradations. This printed surface, with the ink still wet, or soft, is now dusted over with a particular powder-dusted thickly until neither the black paint nor the brighter parts of the plate are visible. A knock on the back of the plate will cause much of the superfluous powder to fall off, but by no means enough. Therefore, a soft, broad, camel hair brush has to be used to brush the surface gently and in all directions, until no more powder comes off. As this powder contains both coarse and fine particles, it will be found that it has stuck to the various parts in the most discriminative way-that is, the coarser grain has adhered to the parts where the ink happened to be thick, and the finer where the ink was less, such as in the gray or light tones. The importance of this discrimination cannot be overestimated, as it affects so materially the quality of the printing surface. We have now, at this stage, a painted picture dusted with a powder which granulates the painted touches in perfect proportion to their depth of tone, without, however, in any way altering their autographic character. But it causes the paint to cover new technical ground, and is the first stepping stone toward the conversion of the painted surface into a printing surface." I may mention that the ink used is composed of German black and a mineral oil, and that the powder is composed of an inert and an active ingredient-the one to give granulation and

We now enter the third stage and take of this granulated surface a "metallic mould," or, in other words, an electrotype. Such is the conductibility of this surface that (all things being right) in ten minutes a blush of copper spreads over the whole surface when subjected to the electric bath. This settles in and repeats the most minute crevices and interstices. The electric current and quality of the bath for this particular work is a matter of careful exporiment, but when once successful, is absolutely certain it its action. The plate is left in the bath until the copper deposit is as thick as an ordinary printing plate, which may mean anything from six to ten days, according to the thickness required. In taking the plate out of the bath it will be seen that the deposit of copper has not only gone over the edges of the original plate, but the new, deposited plate is thickest n edges. By fling the edges we are enabled to separate the deposited from the original painted plate, and in the deposited plate we get an exact negative or mould of the painted and powdered surface, from which, by the ordinary methods of copperplate printing, a perfect reproduction of the original painting is obtained. That is the process.

THE sum of \$29,500 has been subscribed toward defraying the expenses of the meeting of the British Association at Toronto, Canada, in 1897. Ten thousand dollars is contributed by the Dominion government: \$7,500 by the Provincial government and \$5,000 by the city of Toronto.


AN EFFICIENT CAR FENDER.

The illustration represents a fender designed to pick without danger to life or limb, a person caught in

ched to each end of the car, the upper end each standard having ears with vertical n apertures and its lower end having a d-receiving aperture. The side bars of an pen frame are connected by pins to the per ends of the standards, and on the wer portions of the side bars are rigidly onnected sleeves on which are upper and ower lugs, as shown in Fig. 3, the upper lugs being connected to the lower cross bar of the frame by braces. Pivoted at their front ends to the lower lugs are longitudinal brace rods, whose rear ends are threaded and adjustable by means of sleeve-like nuts, as shown in Fig. 2 in the apertures in the lower ends of the standards, and the front end of the fender frame may be raised or lowered in relation to the roadbed by the adjustment of these nuts. The fender proper, covered with netting, is pivoted near the lower ends of its side bars to the lugs or ears near the front ends of the side hars of the other or supporting frame, spiral springs holding the front end of the fender low down. The rear end of the fender is hent to form a pillow or cushion when struck by the head and shoulders of a person falling upon it, the fender then swing-

sions of the rear fender bar resting upon cushioning springs on the side bars of the supporting frame, Across the front end of the fender is a flexible strand of solid round rubber, to prevent injury to the limbs of any one struck thereby, the fender being tilted to horizontal position as a body falls upon it, thus raising the front end of the fender high enough to

prevent the dragging of a person's feet.



barometer on record in New York City, for twenty-one years, both occurred during the great storm of Thurs-


high as 80 miles during the flercer gusts.

The phenomenal fall in barometric pressure was made memorable in the office of the SCIEN-TIFIC AMERICAN by the collapse of its self-recording barometer-a fine instru ment, made by the Draper Manufacturing Company, of this city. Among the many cards taken from this instrument during the nine years that it has done continuous duty, there is only one which shows any approach to the reading of February 6. The card for February 8 of the preceding year shows a reading of 28.60; the instrument at the time of its collapse on Thursday, the 6th inst., recording 28.57.

The lowest record at the Central Park Observatory for the past thirty years is 28:42, which was taken at 9 P. M. on February 5, 1876. The occurrence of these lowest barometers on almost identical dates, viz., the 5th, 6th and 8th of

at the Draper Manufacturing Company's office, 152 that amount, stretches the springs and falls a propor-Front Street, 28.66; at the SCIENTIFIC AMERICAN tionate distance. Company's office, 28 57; at the New York Herald An increase in atmospheric pressure will force a ceroffice, 28.55; and at the Central Park Observatory, 28.00. tain amount of mercury out of the reservoir into the tunately, fails to state the size of the room.

Dr. Draper, of the latter observatory, states that, tube; and the former will rise proportionately. The considering the cyclonic nature of the storm, these readings show a fairly close approximation. Local ine path of a moving car to which the improvement fluences and the vertical oscillations of the barometer

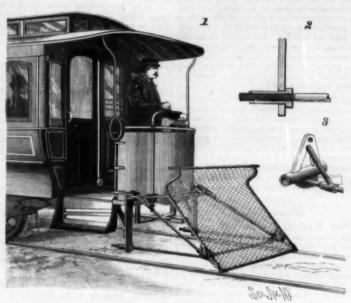

DU QUESNAY'S CAR FENDER.

there would be an increase of pressure resulting from the banking up of the atmosphere by the resistance of the building, and there would be a decrease of pressure on the leeward side resulting from the partial vacuum caused by suction.

We present a cut showing the general features of the barometer in our office and the causes which led may be done with a sponge. Apply the blacking with to its collapse. It consists of a glass tube about three feet in length, which is rigidly fixed in a vertical posi-The highest velocity of the wind and the lowest tion and is provided with an enlarged receiver at its upper end. This tube is filled with mercury, and its it has remained in this state over night, you will then lower end, which is open, dips into a tube or reservoir day, February 6. As recorded by Mr. Dunn at the containing the same metal. This reservoir is suspended flesh side up. After this is done, take a coarse piece of local Weather Bureau station, the wind varied be- on two spiral steel springs and has freedom of vertical

fluctuations are marked on a chart by an ink pencil attached to the reservoir. The normal beight of the mercury in the tube and reservoir is shown by dotted s been applied. It has been patented by Charles in a storm of this intensity produce variations between lines A, A'. In the storm of the 6th inst. the outflow L. Du Quesnay (address in care of Canal Bank), the readings of different instruments in any one city. of mercury was so great that the top of the reservoir Orleans, La. Two braced standards are at- Two barometers placed one on the windward and one was carried below the bottom of the fixed tube, as

shown in the accompanying cut. At the moment when the contact between the tube and reservoir was broken there was a rush of air to fill the vacuum in the upper bulb of the tube, and this was so great that a portion of the mercury was thrown violently against the top of the tube, breaking it completely off, and letting the mercury drain out of the tube. A similar accident happened to the barometer at the New York Herald office in this city, except that the great fineness of the tube in this case prevented a rush of air and mercury sufficiently powerful to fracture the upper bulb.

The range of these very fine instruments was based upon 30 years' readings, and it was reasonably supposed to cover any possible variations from the normal barometer of 29.96 for this locality.

How Harness Makers Work Leather.

"Place your leather in clean water until it is dampened two-thirds the way through," says Harness. "Then take a piece of burlap and wet it. Wrap the stock in this for six hours, or over night. This process does not soak the leather with water, but simply puts it in a mellow condition, from which it will re-


ing back upon its pivotal support, and stop exten- on the leeward side of a large building would vary in tain the crease and finish. When taking your leather readings, for the reason that on the windward side from the cloth in which it is wrapped, take only that which you can work before it will dry out. You will then take off the top edges (if they are to be taken off), then crease your stock and take off the bottom edges. After this is done lay the stock out on a bench to dry After it is thoroughly dry, apply a weak solution of sal soda (only strong enough to cut the grease). This a stiff brush, rubbing it well. After it has remained in this state for ten minutes, you will give the flesh a coat of tallow (rubbed in well with the hand). After take a glass slicker and go over each strap with the cloth and wipe until clear of grease. Leather prepared tween 64 and 72 miles per hour, and it rose at times as motion. When the pressure of the atmosphere di- and finished in this manner will stand the test of water and continual usage, and still retain the crease and finish. There should be great caution used in applying soda, as it is not a good thing for leather, to say the least. In making a custom job I would recom-


mend glass for cleaning the flesh of leather. Leather to be used for folds should be taken down to the desired thickness while the leather is dry, as you will be less liable to spoil them while drawing them through the splitting machine. No strap should ever be creased while it is dry, for leather that is creased while dry will not have a crease on it after it has been used for a short time."

Humidity in Dwellings.

It being granted that bumidity in dwellings is the cause of many diseases, the following simple method of testing, which has been suggested by the Lyon Medical, is interesting. It directs that doors and windows of the room must be closed to prevent the entrance of exterior air and that a piece of fresh quicklime should be

left in the room for February, is noteworthy. The reading, as taken by minishes, a portion of the mercury flows out of the twenty-four hours. It claims that in an ordinary Mr. Dunn at the down-town observatory, was 28 80; tube into the reservoir, and this, becoming heavier by room, if three-quarters of an ounce of water is ab sorbed by the lime, the room may be considered unhealthy. The amount absorbed is determined, of course, by weighing the lime. Our authority, unfor-

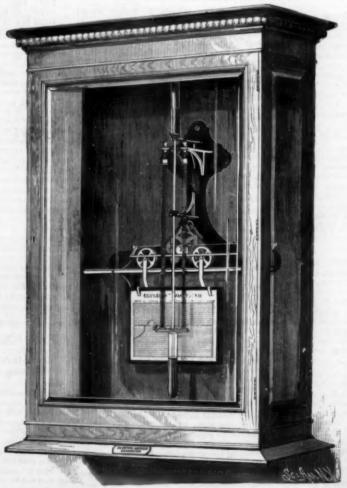

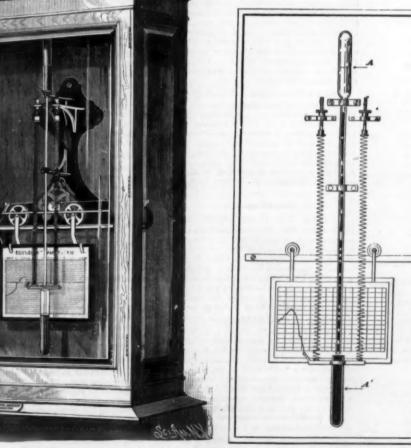

SCIENTIFIC AMERICAN SELF-REGISTERING BAROMETER BROKEN BY ATMOSPHERIC DEPRESSION ON FEB. 6, 1896.

RECENTLY PATENTED INVENTIONS. Engineering.

REFINING ZINC. — George M. Holstein and John D. James, Pulaski City, Va. A process of and apparatus for refining zinc spelter and separating therefrom the lead, patented by these inventors, is based on the specific gravity, the melting points, and the volutilizing points of the two metals, and provides therefor special furnaces and retorts. The furnace fires are designed to be so regulated as to keep the retorts as nearly as possible at the temperature at which sinc volutilizes, load requiring a slightly greater heat to volutilize, and the lead in melting collecting at the lower part of the retort, this part of the retort being exposed to the air, which chills the metal and diminishes ebuilition. The volutilized zinc passes over a bridge into a condenser.

ZINC REFINING FURNACE.—George M. Hoistein, Pulaski City, Va. For better carrying out the above process this invention provides a farnace designed to save fuel, the front ends of the retorts being made lower than their back ends, to cause the lead to flow to the front, where there is an externally exposed dam, the moites metal flowing out only through a tap hole, and the condensers being arranged to open only in the top part of the front ends of the retort. All the operations are conducted from the front, and the lead may be drawn off from time to time without stopping thefurnace. Zinc dross, gaivanizers' waste, or other forms of sinc or sinc triumlings may be treated in the furnace.

Railway Appliances.

CAR FENDER.—John F. Girtler, Brooklyn, N. Y. In this device a main frame, which may be residly applied to and removed from the dashboard, supports a swinging piatform adapted to rock forward and rearward, a spring-pressed guard being normally locked in place by the platform. When a person is struck by the moving car, and fails back upon the platform, a guard frame is awang up by aprings, to prevent the person falling out of the fender. The entire fender may be readily awang up into folded position.

CAR FENDER AND BRAKE.—George W. Beard, Baltimore, Mil. This fender is located entirely beneath the car platform, the front edge of which is cushioned by a hollow elastic tube, and the fender has a front or tripping frame, which, on coming into contact with an obstruction in the path of a moving car, adjusts the fender in position to catch and retain a person caught. The fender is also pivoted to a vertically movable frame provided with brake shoes, the fender and brake being automatically lowered by the action of the tripping frame, although they may be lowered at will by pressure suon a treadle on the car platform.

CAR DOOR.—John J. Mulligan, Vickeburg, Miss. This invention provides a light and water proof freight car door, preferably made of metal, which may be conveniently slid over the door opening to closed position, the door being guided and having only a sliding movement, while it is provided with a lock and automatically locks itself when closed.

CAB WINDOW VENTILATOR.—Charles Whitlow, Washington, D. C. This is a device which may be readily applied to or removed from either end of a window, and so adjusted as to admit air in any desired quantity, the incoming air being protected by external hoods. The device may be compactly stored when not in use, and has independently adjustable ventilating sections so guarded as to avoid excessive draught upon the rear section of the ventilator.

RAILWAY FROG.—Edward N. Grigware, Caseville, Mich. This invention relates to devices for shifting or setting the frog similarly to the tongue of the switch, that the joint between the main line rails and siding may be closed as completely as possible. Pivoted to a base plate attachable to the rails is a frog having its opposite ends adjacent to the rails, shoet metal stops with bent up central portions being accured to the base plate on opposite sides of the frog. The device is simple and inexpensive, and the parts are not liable to become deranged or broken by hard usage.

FISH PLATE LOCK.—Albert E. Trentowsky, St. John, Canada. This is an improvement whereby one of a pair of fish plates is provided with lengthwise keyhole slots to receive the bolts that attach is to the ralls, being locked in place when engaged by the bolts by a removable device. The locking device consists of a curved apring having a portion which engages the bolts and another portion which engages the wall of the slot, a prong or finger of the spring entering the slot and engaging the slidable splice.

Electrical.

TELEPHONE SYSTEM.—Walface A. Houts, Parker, South Eskots. A call box is provided with a revoluble wheel and a revoluble indicator, according to this improvement, a spring having its ends secured to the wheel and the indicator being wound up by the rotation of the indicator relatively to the wheel, the wheel operating a circuit-breaking mechanism. The improvement is designed to diminish the employes of a central office, and provide a simple and efficient call box and automatic switch, whereby any call box may be operated to work the switch and connect one telephone with any other of the series in the system.

BATTERY.—Charles J. Hirlimann, Fort Lee, N. J. The jar of this battery has interior flanges, and the zinc element extends around the interior of the jar, while the carbon element comprises two cup portions having perforated walls, there being a flange on the upper portion of the carbon element adapted to rest on the flanges in the jar, and there being two ears on the carbon element to which line wires may be connected. The carbon element presents a large surface to the action of the exciting medium, presenting practically a two-cell battery in one jar no larger than the ordinary single cell jar.

FUSE HOLDER AND LIGHTNING AR-SESTER.—Herry A. Lewis, Norristown, Pa. This is an improvement in devices for automatically cutting out the line of an electric circuit when the current is excessively increased. A fusible wire is made to form part of the line, this wire being designed to be burned out with too great current, and the invention provides means for easily interting and removing the fuse block and an automatic device for grounding the excessive current, the improvement embracing two slotted binding posts in the slots of which are spring-champing devices, a fusible wire connecting the posts.

ELECTRIC RAILWAY,—Augost Casazza,
Hoboken, N. J. This invention is for a conduit line road
in which the line wire is made up of a series of independent insulated sections, an automatic switch bringing the several line sections in and out of the circuit as
the car passes along the track, so that the line wire is practically dead and harmiess. The switches are operated
by an independent local circuit, preferably energized by
a storage battery on the car, so that they may be worked
without reference to the line circuit, the entire system
being designed to be certain of operation, durable, and
little likely to get out of repair.

SIGNALING AND SWITCHING.—John D. Taylor, Chillicothe, Ohio. This is in part an improvement upon a former patented invention of the sanc inventor, providing improved mechanism for operating the rail switch, arranging the circuits so that an accidental cross will not lead the current to a switch or signal where it is not wanted, providing for reversing the switch-operating motor to avert the possibility of failure of arrest of its operation at the right point, and reducing the number of wires to operate a switch and signal plant.

Mochanical.

PAPER MAKING MACHINERY.—Alfred H. Smith, Wilmington, Del. This invention provides an improved guide for the felts and wires of paper-making machines, comprising reciprocally be hanced rollers adjacent to the guide roller and connected with its sliding bearing, the auxiliary rollers, receiving the sides of the felt or wire, so that on the oblique travel of the latter either roller is overbalanced, and the bearing is shifted to change the position of the guide roller to correct the movement of the traveling wire or felt. The improvement affords a very sensitive apparatus to correct the tendency of the felt or wire to run to one side.

DISTRIBUTING GEAR.— James T. F.
Conti, Paris, France. For controlling the supply of
steam, compressed air, etc., in operating accessory apparatus simultaneously with the action in the motor cylinder, this invention provides a series of valves arranged
in circular series and provided with segments, a lever
mechanism comprising a segmental arm being movable
into engagement with the several valve segments, and
there being means for imparting a rotary movement to
the arm, and a stop to prevent its complete rotation.

ELEVATOR POWER WHERL.—George S. Fouts, San Jose, Cal. This invention is an improvement on a former patented invention of the same inventor, and comprises a revolving drive wheel pulley having movable clamping sections operated by can surfaces normally held from turning with the wheel, the cam surfaces being capable of a partial revolution, and being adapted to be set to release the clamping sections at different portions of the circumference of the pulley.

Agricultural.

CULTIVATOR.—Harm H. Franzen and Rudolph Haschemeyer, Golden, Ili. This is a machine which, in addition to the beam and cultivator bindea, has an auxiliary cultivator rotatably mounted and driven by contact with the ground, being attached to the beam in a manner to pass between the hills. The ordinary cultivating bindes operate in the usual manner as the machine advances, cultivating the ground at each side of a row of hills, while the other or weeding cultivator entitvates the ground crosswise adjacent to each plant to eradicate all weeds, it being designed to cultivate a field at one passage of the smachine.

TRANSPLANTER.—Joseph S. Ober, Ridgeley, Md. This is a pneumatic device, in which a transplanting cylindrical shell, with sharpened lower edge, adapted to be forced down around and over the plant, is connected with and forms a part of an air pump, the pulling up of the piston of which forms a partial vacuum to sesist in withdrawing the plant, from the earth, while the forcing down of the piston compresses the air and tends to force the plant from the shell without injury to its foliage.

Miscellaneous.

BICYCLE AIR PUMP.—Willis H. Oatrander, Boston, Mass. This is a pump which cannot be detached from the bicycle, its barrel being formed of one of the tubular brace bars of the frame, while the piston rod is guided at its upper end in a branch of a hollow saddle post, the operating handle being arranged to lie normally below the saddle. An elastic tube, normally held along the brace bar, is connected with the discharge end of the pump, and has at its outer end a nipple adapted to be inserted in the air valve of the tire.

STREET CLEANING MACHINE. — Clinton Beckwith, Herkimer, N. Y. This is a machine to be operated by power for simultaneously sprinkling the street, taking up and removing the dirt, disinfecting it, and discharging it at intervals. The machine has an inclined elevator or carrier trank or casing whose lower end has a rearwardly diverging mouth into which is discharged an air biast and aqueous spray through a wide spreading nozzle impinging against the road bed, the same blast also blowing a disinfectant into the trash. The air biast may be used either with the water spray and disinfectant or alone.

TURPENTA...... HACK.—Edward Blount, Quitman, Ga. This is a tool of scoop-like shape with curved cutting edges for making the requisite cuts in trees, and the tool is formed, according to this improvement, with a shank which permits its ready attachment to and removal from the handle. The hack is thus made reversible, so that one edge can be used after the other, and less frequent sharpening will be required.

BALL FOUNTAIN PRN.—Sirus E. Kochdarfer, Hollidaysburg, Pa. This is a tabular marker or pen for marking boxes or packages, the cap at one end of the tube holding the marking fluid having a drawn-in flange within which fits an outwardly projecting ball, against which boars a spring-actuated presser. An annular pad held by the presser prevents the too free passage of the marking fluid to the sphere, which forms the marking device, and yet permits the pressure upon the sphere to regulate the amount of marking fluid supplied.

ALBUM. — Felix Reifschneider, Brooklyn, N. Y. This invention relates especially to photograph albuns which have removable leaves, and provides for the leaves lying flat when the album is opened. Inexpensive and durable devices are also provided for removably accuring the leaves in the binding, whereby one or more of the leaves, or all of them, may be readily placed in position in the album or removed therefrom.

PERFUMING DEVICE. — Frederick G. Finher, Battle Creek, Mich. For perfuming and scenting the air of rooms, this invention provides a simple and inexpensive mechanism for utilizing the perfume in the most economical manner, the perfume being held in a pivotally mounted receptacle from which it is discharged in a continuous and regulated manner, according to the adjustment, by a specially arranged clock mechanism. The perfuming device may be constructed as a separate instrument, but is preferably embodied in a time piece.

BINDING FOR BOOKS.—Carl A. Evertz, Brooklyn, N. Y. This is a binding especially designed for employment upon heavy sheets or leaves, such as the thickened leaves of sample books, albums, scrap books, etc., the leaves being provided at the bound edge with a reinforce or hinge strip of cloth or similar material, and the reinforce being attached to the next adjacent leaf or sheet, to dispense with the sewing or kerfing.

BALE TIE FASTENER. — Edinund A. Jabionsky, Brooklyn, N. Y. The bale tie bands or hoops, according to this improvement, are connected by end loops with hooks adapted to be hooked one upon the other, the hooks having at their hook ends laterally projecting higs adapted for engagement by the prongs of an unfastening lever, whereby a bale may be conveniently opened without cutting or destroying the tie fastener.

COVERING FOR RUNWAYS, ETC.—Frank
J. Lennon, New York City. In the runways of stables,
by which horses pass from one floor to another, and
for other similar uses, this invention provides a floor
covering designed to afford a secure foothold and prevent slipping. It is formed of narrow elastic strips of
rubber or similar material, put on in tubular or looped
form, and with their edges overlapping, thus protecting
the fastening devices by which the strips are held in
place.

SCRERN. — George D. Henry, West Grove, Iowa. This screen contains a removable panel constituting a fly trap, while not interfering with the external appearance, of this section of the screen, the trap also having a bait holder which will be inaccessible to the flies and a concentrating chamber into which most of the flies will find their way, provision being made for readily emptying the trap of the flies caught.

FOLDING COT.—Ed win F. Tilley, New York City. This is a cot which may be easily folded into compact form, to take up the least possible space. It consists of a mattress frame to which end posts are connected by links, the frame having extended upon formed with notches in each portion to receive two parts of the respective posts, the dual connection affording a more secure and rigid structure.

BROOM.—James Bowell, Port Arthur, Canada. As a new article of manufacture, this inventor provides a broom of broom corn and a fabric web, the latter extending lengthwise and from side to side about centrally of the broom, and being held in such position by the binding wires or threads. The broom is thus designed to sweep the finest dust, and the fabric forms a backing for the layer of broom corn at either side, the efficiercy and wear of the broom being thus greatly increased.

WINDOW SASH. — Charles C. Miller, Brooklyn, N. Y. To prevent rattling of the sash in its casing, on account of atmospheric changes, this inventor provides a yielding attachment for the side rails, and to which the weight cord is attached. It comprises a metal boxing adapted to slide in the casing and a metal shell secared to the side rail of the sash, while springs secured to a reinforce strip in the shell bear against the inner surface of the boxing. The shell and boxing are so connected that the sash may be readily removed when desired.

FOLDING BABY CARRIAGE,—George Mayer, New York City. This carriage is designed to fold both longitudinally and laterally, and to be of more simple construction and more easily operated than baby carriages heretofore made. The axies are formed of jointed sections, and a coupling extending from one axie to the other is capable of folding laterally with the body portion of the vehicle, the end portions of the body being also jointed and mounted to swing forwardly and rearwardly.

WASHBOARD HOLDER.—James A. W. Sears. Escanaba, Mich. This holder has telescopic sections adapted for adjustment upon each other for any width of washboard, there being at the end of each section clamping devices for fitting the holder upon the washboard and attaching it to a tub of any diameter, in such manner that the washboard may be conveniently swung into and out of the tub as desired.

PUZZLE.—Stephen A. Bartlett, Demarest, N. J. This pazzle is designed to imitate "Chickens
in the Garden," and comprises a suitable base on which
is a circular casing in which is arranged a series of
channels around a goal, a pen, and gates swinging open
in one direction controlling the ends of the channels.

The balls are made to travel in the various channels by
dilling the base, and considerable skill is called for to
thus assemble the balls at the goal.

Designs.

PAPER CUTTER.—James Slater, New York City. This design is for a paper cutter shaped to simulate the heel, instep, and pointed sole of a slipper, with a high and small heel and highly suched instep.

BRUSH CORE.—Henry M. Livor, New York City. This design has a cylindrical core, with a helical groove in its cylindrical surface, the groove having at intervals widened and deepened portions.

Norz.—Copies of any of the above patents will be furnished by Mann & Co., for 25 cents each. Please send name of the patentee, title of invention, and date of this paper.

NEW BOOKS AND PUBLICATIONS.

La MECANIQUE GENERALE AMERICAINE, By Gustave Richard, Paris: J. B. Bailliere et Fils. 1896, Pp. 630, 4to, 1441 illustrations. Price \$2.40.

This work has special reference to the machinery and industry represented at the Columbian Exposition of 1808. The illustrations are very largely obtained from trade catalogues. It will without doubt serve a useful purpose in giving French manufacturers a better idea of our machinery and manufacturers.

How to Shoot a Revolver. A simple and easy method of becoming an expert revolver shot. By Major William Preble Hall, U.S.A. Washington: The Army and Navy Register. 1895. Price 50 cents.

The author has a well deserved reputation as one of the best revolver shots in the United States, having won six of the medais the government awards each year to the best revolver and carbine shots in the cavalry. This little pamphlet is certainly deserving of a large circulation, for it has been proved repeatedly that the average soldier and policeman, the police especially, are extremely bad shots with a revolver.

TRANSACTIONS OF THE AMERICAN SO-CLETY OF MECHANICAL ENGINEERS, Vol. XVI. New York: Published by the Society. 1895. Pp. 1209, 8vo. 326 illustrations, portrait.

This portly volume gives, in addition to the proceedings of the various meetings of the society, a series of most valuable papers, which are freely illustrated, read by members of the society. Among these papers are articles on improved forms of steam separators, centrifugal governor, drawing office appliances, some tests of the strength of sprace columns, stresses in the rims of pullevs and fly wheels, rail pressures of locomotive guiding wheels, rastless coatings for iron and steel, the theory of the moment of inertia, the development of electric tramways, a portable disinfecting plant, a new shaft governor, new forms of friction brakes, pipe covering tests, efficiency of boilers, etc.

SHOP KINKS AND MACHINE SHOP CHAT.
A series of over five bundred practical paragraphs in familiar language, showing special ways of doing work better, more cheaply and more rapidly than usual. By Robert Grimshaw. M.E., etc. New York: Norman W. Henley & Company. 1806, Pp. 393. With 222 engravings. Price \$2.50.

This work, by the well known and popular author, Robert Grimshaw, is one of those that seems to possess the capability of taking the ordinary workman, to a certain extent, out of himself, and of causing him to loave the grooves of conservatism and to originate his own methods. The book, in other words, is of the suggestive order. In its well printed pages we find described any number of excellent methods and hints for the machinist presented in the lively style which has become identified with the author. Many illustrations are given and each hint consists of a paragraph with full type headings, so that anything can be readily found. But one portion of the work which we must commend especially is the index, to which some thirteen closely printed pages are given, making a most complete reference table for the somewhat varied matter contained in the book. The illustrations, of which there are 222, are fresh and new, and excellent examples of the illustrator's art. As an excellent example of the author's style, his dash and the personal element strongly presented, we refer to the concluding section under the heading "Emergencies." But it is not fair to not only a single section; everywhere throughout the book will be found excellent suggestions put in the same practical and graphic style. Correct treatment of files, a new style of center gage, illustrated, the evils of the set screw, good and bad types of bolier calking tooks, straightening bent taps, are samples of the matter treated. The book will meet with appreciation from all interested in mechanics.

BICYCLE REPAIRING. A manual compiled from articles in the Iron Age.
By S. D. V. Burr. New York: David
Williams. 1896. Pp. 166. Price \$1.

This excellent and fully illustrated work is peculiarly timely. It describes various repairs which have to be executed on bicycles, incidentally, of course, touching largely upon the construction of the modern cycle. The author's well known standing as an engineer and writer has been supplemented in the production of this work by suggestions and information from manufacturers of bicycles. With a view to future editions, an invitation is extended to all who are interested in the subject to send in further information and suggestions. It must not be supposed that the work is intended only for bicycle repairers; it will be of considerable interest and value to the owners of bicycles, enabling them to execute their own repairs or possibly to intelligently supervise their execution by others. The intelligent cyclist wants to know his wheel, and wants to feel that he can recognize its needs in case of accident or of adjustment. This book in popular style will put him in possession of precisely the points he requires, and will help him to know whether repairs have been executed properly and what is a reasonable charge for the same.

Qusiness and Personal.

on for insertion under this head is One Dollar a lists A cusertion : about eacht, words to a sine. Adver-us must be received at publication office as early as morning to appear in the following week's sauce. 3: e Iron Works. Chicago, Catalogue free.

metal polish. Indianapolis. Samples free.

Proces & Dias. Ferracute Mach, Co., Bridgeton, N. J.

H. e & Spoke Mcby. Over Lathe Co., Chagrin Falls, O. Mach'y to manuf. on royalty. Box 56, Troy, N.Y.

machines, milling machines, and drill presses, rvin Mach. Co., Laight and Canal Sts., New York. the Hough Security Cash Recorder. Entirely dif-from a Cash Register. Hough Cash Recorder Co., steld, Mass.

hest book for electricians and beginners in elec-is "Experimental Science," by Geo. M. Hopkins. aut. \$4; Munn & Co., publishers, 331 Broadway, N. Y. Wanted—An experienced compression for machine engineer. Must be sober, industrious, and thoroughly reliable. Send address to F., Station G. Philadelphia.

ge send for new and complete catalogue of Scientific and other Books for sale by Munn & Co., Mil Broadway, New York. Free on application.



HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters, or no attention will be paid thereto. This is for our information and not for publication.

References to former articles or answers should give date of paper and page or number of question. Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn.

Buyers wishing to purchase any article not advertised in our columns will be furnished with addresses of houses manufacturing or carrying the same.

houses manufacturing or carrying the same.

Special Written Information on matters of personal rather than general interest cannot be

expected without remuneration.
Scientific American Supplements referred to may be had at the office. Price 10 cents each.
Book's referred to promptly supplied on receipt of price.

price.
Minerals sent for examination should be distinctly marked or labeled.

(6725) C. F. K. asks (1) how to fasten carbon on to copper or brass so it makes a good electri-cal contact. A. Electroplate the carbon with copper and if necessary solder the copper or brass connections thereto. The simple contact connection should suffice. 2. How many feet of No. 28 wire (A. W. G.) have a resistance of 17 ohms ? A. Approximately, 822 feet; practically, a less quantity will probably give the resistance

(6726) H. S. asks for the conducting power of aluminum compared with gold or copper for lightning rods or points for rods. A. The modern views of lightning protection do not make the true conductivity of the rod the only factor in its efficiency. Some consider iron as good as copper. The SCIENTIFIC AMERICAN SUPPLEMENT, Nos. 506, 906, 976, 998, and 1035, gives most excellent papers on the subject of lightning rods, and we refer you to them for fuller treatment of the subject. Price 10 cents each by mail. Aluminum has about sixtenths the conductivity of copper. It would make fairly good points.

(6727) A. W. asks how to make a simple electromagnet, A. For information concerning elecmagnets we refer you to our SUPPLEMENT, Nos. 182, 77, 778, 779, 780, 781, 784, 785, 786, 788, 789, price 10 cents

(6728) H. W. C. asks: What can I put into gine that has been dissolved in whisky but does not remain liquid when temperature gets below 70°? I do not want to use acids, as they weaken the glue. A. Try the addition of glycerine or of alcohol.

TO INVENTORS.

An experience of nearly fifty years, and the preparation of mare than one nundred thousand applications for patents at home and abroad, enable us to understand the laws and practice on both continents, and to possess unequaled facilities for procuring patents everywhere. A synopsis of the patent laws of the United States and all foreign countries may be had on application, and persons contemplating the securing of natents, either at home or abroad, are invited to write to this office for prices, which are low, in secondance with the times and our extensive facilities for conducting the business. Address MUNN & CO., office SCIENTIFIC AMERICAN, 301 Broadway, New York.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Granted

February 11, 1896,

AND EACH BEARING THAT DATE

See note at end of list about copies of these patents.

Allo m. See Burglar alarm.	
Animal trap, Burton & Eberbardt	554.96
A L. Cashman	554 61
Atomizer valve, W. H. Wigmore	0.04,01
Augor cartie 7 th C. Wigingre	304,40
Auger, earth, J. W. Kenevel	304,41
Axle, carriage, E. P. Jordan	554.52
	554.51
Dake pan. J. P. Roldon	REA N
	CHARLE
Battery, W. S. Doe.	
Bouring and Doe	354,24
Bearing ball A No. Barnes	854,57
Bed, invalid, 8. J. Conkwright	554.56
Bedstead, metallic, L. Coburn.	3.54 AT
Belt, E. Cooper Bicycle brake, E. S. Hall	554,47
Bicycle hearn II a II-11	004,44
Bicycle brake, R. S. Hall.	554,41
Bicycle brake, automatic, W. F. Elliott	554,41
Bicycle frame, C. E. Tomlinson.	354,46
Bicycle holder, J. J. McKanna.	554.45
Bicycle anddle Dodde 6 20	5.5 A Oct

	Scientif	ttc
	Bicycles, electric lamp holder for, E. D. Biockwell Billiard cue chalk apparatus, H. Liebreich. Bit. See Countersinking bit. Bit. See Countersinking bit. Botts, anticapasing and life-saving appliance for amail, W. You tudiger. Boiler, C. T. Toulmin. Boilers, preventing scale in steam, B. McCabo Boile. See Self-locking boit. Bottle, T. W. Sichards. Bottle, T. W. Sichards. Bottle, T. W. Sichards. Bottle stopper, C. H. Davis. Bottle, T. W. Sichards. Bottle stopper, C. H. Davis. Bowling alleys, ball runway for, W. H. Wiggins. Box. See Char box. Distributing box. Br. See Char box. Distributing box. Br. See Char box. C. Reinhardt. Brake, De Bicycle brake. Car brake. Brake application, automatic fluid pressure, T. J. Hogan. Hogan.	554,46
	Bit. See Countersinking bit. Boats, anticapsizing and life-saying appliance for	004,62
	amail, W. Von dudtger	354.3E
	Bollers, preventing scale in steam, B. McCabe Bolt. See Self-locking bolt.	854,50
	Bottle, W. C. Jerome. Bottle, T. W. Richards.	564,519
	Bowling alleys, ball runway for, W. H. Wiggins.	564,611
	Box. See Clear box. Distributing box. Bracelet, J. Forsheim	554.417
	Brake. See Bicycle brake. Car brake.	564,300
	Hogan. Resign lawar differential V. A. Balli	554,63
	Brake apparatus, automatic fluid pressure, T. J. Hogan. Brake lever, differential, J. A. Brill. Brake lever, differential, G. W. Cowan. Bridge, draw, E. B. Jennings. Brush for cleanning, scapping, T. Finne. Bug and fies trap, G. Ipson. Burglar sinru, electrical, C. Coleman.	554,475
	Brush for cleansing, scraping, T. Finne	554,38 554 49
	Burgiar alarm, electrical, C. Coleman. Burner, See Lamp burner, Locomotive oil	554,500
	Burglar airm, electrical, C. Coleman. Burner. See Lamb burner. Locomotive oil burner. Refuse burner. Button, D. B. Seward. Button, Ink cuff, J. W. Fabr. Cable cilp. Cover & Tibbits. Calpering instrument, G. W. Mings. Cap, G. Hirschberg. Car and air brake coupling, automatic, O. Le- compte.	554 54
	Button, link cuff, J. W. Fabr	554,544 554,483 554,334
	Can. See Oil can.	CO-CAR
1	Cap, G. Hirschberg Car and air brake coupling, automatic. O. Le-	554,000
1	Car brake, R. H. Black	564,52
1	Car brake, F. Gabler.	554,50° 554,58
I	Car coupling, O. Z. Coutant	554,49
1	Car coupling, H. Raymond.	554,43
	Car coupling, J. A. Roosevelt.	554,53
Ì	Car coupling, M. Wells.	554,610
	Car fender, W. D. Gold	554,487
	Car fender attachment, R. Muir	554.52
1	Cap, G. Hirschberg. Car and air brake coupling, automatic, O. Lecompte. Car brake, R. H. Black. Car brake, F. Gabter. Car brake, F. Gabter. Car brake, F. Gabter. Car coupling. O. Z. Coutant. Car coupling. M. M. Decker. Car coupling. W. F. Richards. Car coupling. W. F. Richards. Car coupling. W. F. Richards. Car coupling. J. F. Smith. Car coupling. W. H. Ship Car Carding. Car fender, W. D. Gold. Car fender, W. D. Gold. Car fender, automatic. D. F. Manning. Car fender, automatic. D. F. Manning. Car fender or guard. H. Sohweers. Car replacer. H. H. Hawkins. Car roof, P. H. Marphy. Cars, platform construction for street or other, J. A. Brill. Carding engine feeder. J. F. Geb.	554,463
	Car roof, P. H. Murphy	554,39
	Cars, platform construction for street or other, J. A. Brill	554.28
ĺ	A. Brill. Carding engine feeder, J. F. Geb. Carving, routing and mortising machine, T. D. Cook.	554,28
	Casting mould, metal, W. H. Smethers.	554,38 554,38
	Castings, machine for cleaning, H. Beeg Chair. See Piano chair.	554,47
	Check protector, G. W. Beebe	564,61
	Cigar fillers, machine for forming continuous, J.	204,592
	Cigar machine, J. Reuse	554,606
	Clasp. See Letter clasp.	005,50
	Clip. See Cable clip.	554 D.
	Ciothes line support, J. Pagliughi et al	554,49
	Clutch, friction, J. M. Dodge.	564,585 564,99
۱	Combing machine, Gunerman & Schacht	554,380
l	Condenser and aerator, steam, E. Rowe	554,586
	Converter, pueumatic, C. S. Price	554,45
	Corn husking machine, G. S. Gundersen Corn, snapper and fodder cutter, Chapman &	554,26
	Creider	554,26
	Carding engine feeder. J. F. Geb. Carving, routing and mortising macchine, T. D. Carving, routing and mortising macchine, T. D. Casting mould, metal, W. H. Smethers. Castings macchine for cleaning, H. Beog. Chair. See Plano chair. Chair fan attachment, rocking, J. A. Gerlemann. Check protector, t. W. Beebe. Cigar box, W. F. Fuchs. Cigar tox, W. F. Fuchs. Cigar the machine, J. Reuse. Cigar the machine, H. Bohls. Clasp. See Letter clasp. Cleaner. See Dish cleaner. Cip. See Cable clip. Clothes line support, Phillips & Class, Jr. Clothes line support, S. E. Roweller. Condenser and aerator, steam, E. Roweller. Condenser, steam, H. A. Wheeler. Converter, pueumatic, C. S. Price. Converter, steam, H. A. Wheeler. Converter, steam, H. A. Wheeler. Converter, pueumatic, C. S. Price. Converter, steam, H. A. Wheeler. Converter, See Car coupling. Car and air brake coupling. See Car coupling. Car and air brake coupling of the Coupling. Car and air brake coupling. Car and air bra	
	coupling. Pipe coupling. Thill coupling. Creamor gage and indicator, W. M. Gartshore. Crimping tool, F. Westerbeck. Crapping tool, F. Westerbeck. Culmary device, W. J. Schneider. Current requision autosastic, S. C. C. Currie. Currents, regulating phase relation of alternating, E. J. Berg. Curtain and pillow sham supporter, window, E. W. Farnham. Curtain fixture, M. T. & M. E. Bentley. Cutter. See Tire bolt cutter. See Tire bott cutter. Cycle wheel decorative attachment, H. V. Swan Cyclometer, J. Boggituper.	554,25 554,56
	Crusher. See Ore crusher. Culinary device, W. J. Schneider	554,336 564,436
	Current regulator, automatic, S. C. C. Currie Currents, regulating phase relation of alternat-	
	Curtain and pillow sham supporter, window, E.	564,520
	Curtain fixture, M. T. & M. E. Bentley	554,33
	Cycle wheel decorative attachment, H. V. Swan	554.49 554.49
	Decoy, W. Kunselman	554.30
	Dipper, H. M. O. Thode	554,55 554,33 554,43
	Distributing box and fuse plug, P. S. Brown	554,436 554,615
	Doors, device for automatically controlling clos-	554,517
	Dough preparing and shaping machine, H. F. W. Hues.	554,277
	Draught equalizer, S. A. Miller	554,510
	Drier. See Lumber drier. Mait drier. Dry kiin, V. L. Emerson	554,25
ŀ	Duplex tube, J. T. Thorpe	554,580 554,325 554,58
	Blastic fabrics, producing, R. Piechner	554,535
	Plactric conductors, machine for connecting, H.	554,538 554,268 554,681
	Electric conductors, machine for connecting, H. J. Savory.	554,543 554,682 564,379
	J. Savory. J. Savory. J. Savory. Electric baster or rheostat, Kraemer & Krugor. Electric ight cabinet. E. L. Slocum. Electric machine controller, dynamo, Knight & Darley. Jr	564,379
	Darley, Jr. Electric motor, J. H. Guest	554,276 554,300
	Darley: Machine Conscious, Washington, Sanguage Darley: Beleating motor, J. H. Guest. Electric motor, J. H. Guest. Electric motor, G. H. Whitehead. Electrical system, three wire, Hewlett & Potter Electrical converters, automatic cut-out for, W. J. Greene. Electrical distribution, J. Burke.	554,366 554,366 554,366 564,557 564,270
	Electric system, three wire, Hewlett & Potter Electrical converters, automatic cut-out for W.	
	J. Greene. Electrical distribution, J. Burke.	554,506 554,240 554,628
	J. Greene. Electrical distribution, J. Burke. Embroidering machine, R. T. Smith. Engine, See Rotary engine. Engine, E. Ortmani. Engine, Entrolling mechanism, J. L. Heald.	504, 628
	Engine, E. Ortmans. Engine controlling mechanism, J. L. Heald	554,522 554,360 554,367 554,636
	Exercising machine, F. Hulsmann	554.636
	Extension table, E. S. Dilworth	564,227
	Faucet and filter, combined, Linke & Gould	564,251 564,251
	Feit boot, T. S. Very	64,468
	Fence, J. E. Etter	554,441 554,339
	Fence post, L. Middleton	64,391
	Fender. See Car fender. Fifth wheel, T. J. Herring	554,269
	Emoroughing See Rotary engine. Engine. See Rotary engine. Engine controlling mechanism, J. L. Heaif. Excelsior machine, D. A. Heikel. Exercising machine, F. Hulsmann Extension table, E. S. Dilworth. Eyeglasses, J. J. Bausch Eyelet, E. Kempshall. Faucet and filter, combined, Linke & Gould. Feeders, transferring, J. Burko. Fette book, T. S. Very. Fette beadwar, E. E. Rowland. Fence, J. E. Stery. Fence machine. Fence machine. Hild Belleton. Fonce, J. E. Stery. Frence machine. Fith wheel, T. J. Herring. Fith wheel, T. J. Herring. Fith wheel, T. G. Read. Fith wheel, T. J. Herring. Fith wheel, T. Nesom Fite, Bennett. File, Letter or bill. Gottwais & Elis. File, paper, S. A. Douglass. File, paper, R. A. Sharp. Fitter, Inquid, Linke & Gould. Fire escape, J. Evans. Fire escape, B. Howell. Fire escape, B. Howell. Fire extinguisher, chemical, J. N. Eastwood.	564,375
	Filth wheel, vehicle, T. Nesom File, R. Bennett	554.574 554.000
	File, paper, S. A. Douglass	554,363 55#, 500
	Filter, J. M. Robinson.	564,312 564,200
	Filter, iquid, Linke & Gould	554,279 554,567
	Fire escape, R. Howell Fire extinguisher, chemical, J. N. Eastwood	554,515 554,363 554,540
	Fire escape, R. Howell Fish extinguisher, chemical, J. N. Eastwood. Fish extract. making, F. Sahlfeld. Fish scaler, M. C. F. Acuero. Fluid compressor, H. P. Morgan. Flv frame, C. Whitaker Fly frame, cope rack actuating mechanism for.	554,540 554,637 554,604
	Fluid compressor, H. P. Morgan	554,604 554,409
		554,408
	Food compound and making same, J. H. Hether- ington	54,306
	Furnace. See Regenerating furnace.	
		54,563
	Williams. Furnaces, mechanism for charging biast, H. G. Williams. Furnaces, relief device for biast, J. Andrews	554,562 164,569
	Furniture leg, W. G. Boughton	104,078
	Williams. Furnaces, rollef device for blast, J. Andrews. Furniture leg. W. G. Boughton Gage. See Creamer gaze. Water gage. Gambrel, folding, P. N. Swanson. Game, F. W. Andrus.	54,549 54,307 54,000
	Garter or other garment holding device, E. Pick-	554,600
	Gas, apparatus for manufacturing, J. A. Waters.	154,304 154,326
	to contation for carbonating bear.	
	etc., process of and apparatus for obtaining	54.959
	air-free carbonic acid, Theurer & Fischer Gas generator, Vestal & Ray	64,852 64,630 64,886 64,633

1		ī
Cas, process of and apparatus for making, W. F. Browne.	654,306	20
rases, apparatus for consuming waste, F. Neve- gold	554,206	1
gold See Gas generator See Gas generator. See Gas generator	554,456	2
rain binder band securing mechanism, L. J. Feliay. rate, E. K. Wost. rate, E. K. Wost. rate filer, W. T. Allen, r. rinding machine, J. Coyne. rounds, method of and means for detecting, J.	554,588. 554,471	ľ
trate, hollow blast rocking, J. L. White	554 356	
irinding machine, J. Coyne.	554,480	200
F. Kelly	554,275	
Sammer and means for charging same with nails, nail-setting, H. S. Garr	554,595	1
Finding machine, J. Coyne. F. Kelly Jun rack, G. Fulk Jun rack, G. Fulk Jun rack, G. Fulk Jammer and means for charging same with nails, nall-setting, H. S. Garr. I arosas, track, Persels & Mack Jarvester reed, H. F. Steward Jarvester reed, H. F. Steward Jarvester reed, H. F. Steward Jarvester, W. G. Bleker Jay loader, G. W. Packer Jay Joader, G. W. Packer Jay Junder, G. W. Packer Jay Junder, G. W. Packer Jay Junger, J. Jay June Joseph J. Jay June Joseph J. Jay June Joseph J. June Joseph J. June Joseph J. June	554,306 554,382	1
larvesting machine, J. F. Steward	554,382 554,318 554,311	1
Hay loader, G. W. Packer	554,627	1
leater. See Electric heater. Gas heater. Por- table heater. Water heater.		1
Heating and lighting apartments, device for, P. Fraser Heddie machine, P. M. Point. Hinge, apring, H. F. Kell Hook, See Snap hook. Trace or hame hook, Hoop, J. Jones. Hoop, J. Jones. Hop, Wheel, C. E. Tomlinson. Huller feeder, clover, P. Hofferd. Injector, J. Deamond. Injector, J. J. Sweeney.	554,591	ľ
Heddie machine, P. M. Point	554,374	ľ
Hook. See Snap hook. Trace or bame hook, Hoop, J. Jones	554,446	ľ
Horse blanket, J. H. Dailey	554,244 554,464 554,341 554,415	ľ
njector, J. Deamond	554,415	ľ
njector, J. Deamond. njector, T. J. Sweeney nkstand, R. G. Hopkins.	554,401 554,424	ŀ
nustand, R. G. HOPKINS. Insulating joint, G. J. Carson Insulating joint, L. McCarthy Tron meliting apparatus, B. H. Whiteley	554,382 564,394	1
lron melting apparatus, B. H. Whiteley554,508, lack. See Lifting jack. Rounding jack.	564,569	1
Kiln. See Dry kiln.		1
Dawson.	554,475	1
amp. electric arc, J. A. Seaverns.	554,491 554,542	1
tric, J. Dempsey	554,245 554,548	1
atch, H. F. Keil	554,448	ľ
Letter clasp, S. J. Neugroschi et al Letter marking machine register, M. J. Dolphin	564,628 564,370 554,248	ľ
Lifter. See Plate or pan lifter. Lifting jack, M. Anderson	554,612	1
Lighting jack, lever, J. C. Coffee. Lighting apparatus, H. H. Norrington.	554,612 554,579 554,296 554,295	1
Dawson. Dawson. Jauch. Jauc	554,295	1
		1
Lock, A. Alfors. Locomotive, electric, C. F. Uebelacker	554,566	1
log car attachment, B. W. Johnson	554,342	1
Local dobby, A. Scheid.	864,314	1
Lock, A. Alfors. Lock, A. Lock, A. Lock, L. Loc	554,605	1
Lubricator, H. G. Brown	554,439	1
Lumber drier, G. E. Hong.	554.271	1
Mangle, A. M. Dolph et al	554,500 554,584 554,474	1
dante tree, L. A. Breaze. dangle, A. M. Delph et al. dangle, A. M. Delph et al. description of the state o	554,321	ı
Meet extract and making same, J. H. Hethering- ton. Mill. See Spice mill. Milling mechine, F. Hols	854,200	1
Milling mechine, F. Hols	554,428	1
Sjobolm	554,546	١
Monid. See Casting monid. Moulds, and blast apparatus for cleaning, J. E. Parker. Motor. See Electric motor. Mowing machine, P. F. Hodges. Nuts. etc., machine for shaping sleave, J. Coyne.	554,300	ı
	. 554,601	1
Mowing machine, P. F. Hodges. Nuts, etc., machine for shaping sleeve, J. Coyne Oil can, B. Porter.	554,481	1
Oil can, B. Porter. Dil, device for separating gas and water from, B. Gilmore	554 500	1
oil holder, D. M. Redmond Optical observations, instrument for, G. Noetzel	554,308 554,294	I
Ore crusher, J. Hoger	554,551	ŀ
ven, baking, J. L. W. Olsen. Painter's guard, H. C. Warncke. Painting machine, blind, P. Beck.	554,408 554,572	I
Painting machine, blind, P. Beck Pan. See Bake pan. Dustpan.		I
Pan. See Bake pan. Dustpan. Panoramic exhibiting cabinet, A. A. Aguero Paper doll, H. P. Bailey.	554,688 554,410	
Papermaking machines, producing moulds for, 8. Cramp.	554,243 554,257 554,508	ľ
Penbolder, H. C. Clark	554,503	1
Pianissimo attachment, Blondel & Porcher	554,608 554,387 554,418 554,516	1
er nup. er and pencil holder, B. S. Galloway. enholder, H. C. Clark enholder, H. C. Clark enholder, H. C. Clark endolder, H. C. Clark elanissimo attachment, Blondel & Porcher. elanissimo attachment, E. M. French. elano attachment, L. M. French. elano cotair, M. Huble. elano chair, M. Huble. elano chair, M. Huble.	554,516	ŀ
mann. Flanter, corn. T. S. Grandstaff. Flanter, corn. J. B. Jarmin. Flate or pan lifter, W. J. Shafer. Corsis L. Gagger. Wilder & Pattrell. Oursis D. M. Murphy. Out. See Fence post. Propeller, servew. M. N. Bray. Propulsion of boats. W. Forward. Propulsion of boats. W. Forward. Pruning implement, W. S. Young. Dump, centrifugal air compression, Anderson & Berussen.	564,265 554,262 564,367	1
Planter, corn. J. B. Jarmin.	554,367 554,545	ľ
Plow, R. L. Yeager	554,564 554,561	ľ
Portable heater, J. M. Murphy Post. See Fence post.	564,529	1
Printer's galley, F. L. Denison Propeller, screw, M. N. Bray	554,346 554,331 554,569	ı
Propulsion of boats, W. Forward Pruning implement, W. S. Young	554,433	I
Pump, centrifugal air compression, Anderson & Bernsen	554,534	1
Bernsen ump operating mechanism, W. A. Anderson uzzle, W. G. Adams yrometer, Uebling & Steinbart sack. See Gun rack tacking apparatus. J. Rebasmen	554,568 554,565	ľ
lack. See Gun rack.	554 459	1
tail joint, W. D. Jones.	554,458 554,602 554,607	ľ
tack. See Gun rack. tacking apparatus, J. Rebsamen. tail joint, W. D. Jones. tail support, metallic, F. Tyles. tail tongs, E. Schrants. tailway conduits, slot iron for street, W. H. Hol-	554,607 554,461	1
den way consuits, soot from for street, w. m. flowed and way from F. G. Stormer. Lailway from F. G. Stormer. Lailway switch operating device, C. W. Ferguson tallway tie, P. Noonan. Lailway tie, P. Noonan. Lailways untomatic point or switch apparatus for, Von Gajewski & Braun. Lailways, underground conduit for eluctric, W. S. Morkle. Lake. See Hay rake. Leamer, pipe, Ö. B. Hall. Lecesting tool, Topping & Honiss. Lecesting tool, Topping & Honiss. Lecesting tool, Topping & Louise. Lecesting topping the formation of the struments, mouthpiece for, F. Clapp. Letter the struments, mouthpiece for, F. Clapp. Letter the struments, mouthpiece for, F. Clapp. Letter the struments of the strume	554,445 564,320 554,437	1
tailway switch, W. M. Brown	554,437 554,485	1
tailway tie, P. Noonan	554,372	ı
for, Von Gajewski & Braun	554,256 554,450	1
S. Merkle	554 490	1
tecessing tool, Topping & Honisa	554,420 554,466	1
tecorder. See Time recorder. teed instruments, mouthpiece for, F. Clapp	554,242 554,453 564,499	9
tecorder. See Timo recorder. teed instruments, mouthpiece for, F. Clapp tefuse burner, I. S. McCileban tegenerating furnace, etc., O. Schnigge tegulator. See Current regulator. Stove heat	564,490	9
regulator. Evers, streams, or sea from erosion, means for		1
tivers, streams, or sea from erosion, means for protecting banks of, G. Villa	554,616	1
coller. See Street roller. colling rings, etc., apparatus for, W. D. & J.		
Eynon	554,480 554,374	
otary engine, J. McCloskey	554,200	1
and distributer, J. Martinash fastener, J. F. Pool	554,603 554,305	E
ash holder, J. Schwarz	554,817 554,633	0
ash, revolving window, A. L. Boilesawmill dog, C. Elender	554,596	F
tolling rings, etc., apparatus for W. D. & J. Eynon. 100f. tile. C. Keiser. 100f. tile. C. Martin. 100f. tile. C. Martin. 100f. T. Schwarz. 100f. T.	554,412	LJ
cissors attachment, M. F. Gracam. eed bag, C. N. Choate. eeding machine, C. E. Patric alf-locking bott, J. Killinger. ewing machine, H. H. Bußum. ewing machine, H. Moore. ewing machine, E. Murphy.	554, 694	P.
ewing machine, H. Moore	554,332 554,626	L
ewing machine attachment, O. B. Olson	554,373	0
Moore	554,398 554,552	1987
Moore, hade supporting device, J. W. Turnbull, noe, A. Belaire, houtle box supporting rod, A. Gartner, fter, ash, A. E. Bennett. ded propeller, W. J. Culnan, leigh, G. W. Williams, moke condenser, S. S. Pridham, hap hook, G. M. Hubbard, and hooks in straps, means for attaching, J. W.	554,229 554,258	Î
fter, ash, A. E. Bennetted propeller, W J. Cuinan	564,578 564,563	Y
eigh, G. W. Williams	304,328 554,348	
nap hook, G. M. Hubbard nap hooks to straps. means for attaching, J. W. Lockert	NA 200	S.
panner, L. Mills	564,522	200
pindle support, E. Hitchon	564,514	d
pring compressing mechanism, F. W. Chaffee	564,476	W.
pice mil. F. H. Robbins. jundle support, E. Hitchon. junding machine, J. Brown. ring compressing machanism, F. W. Chaffee. prinkler. See Lawn aprinkler. proceket wheel and chain, J. C. Hochhaus. juare, center, J. R. Topping.	564,272 564,408	ES LI
and. See Umbrella stand.	-1	Y

	125
Starching machine, Hagen & Cooper. Stay, garment, N. J. Wilkins. Stone and A. F. Weaver. Stopper, See flottle stopper. Stove, folding or portable, C. A. Cook. Stove of cooking ot co. gas. t. G. Finlar. Stove has regulator, cooking, Johnson & Frei	554,395 554,385 564,430
Stove, folding or portable, C. A. Cook	864,384 864,363 5-
stove beat regulator, cooking, Johnson & Frei lund Stove leg, A. Staley Stoves, deflector phite for max, J. M. Murphy. Street roller, steam, C. O. Heggen. Switch See Electric awitch. Railway awitch. Syringe, R. Beyer Pable. See Extension table. Packing machine, in E. Westherwax. Tapping machine, in Hearne & Claco. Tea kettle, F. Belling. Tea kettle, F. Belling.	564,598 564,621 564,630
Switch. See Electric switch. Railway switch. Syringe, R. Beyer. Table. See Extension table. Tacking machine, J. E. Weatherwax.	554,470
Tacking machine, J. E. Weatherwax Tapping machine, main, Hearne & Cisco. Tea kettle, C. F. Ebling. Telegraph receiver, L. E. Ochring. Telephone arm rest and table, F. Hofmeister. Telephone switchboard apparatus, C. E. Seribn Tomperature controlling apparatus, W. P. Poters	554,513 554,395 554,895 554,488 er 556,399
Temperature controlling apparatus, W. P. Pot ers. Testing properties of materials under tunii stress, machine for, T. Oisen.	lo 1554 907
ers resting proporties of materials under tensi stress, machine for. T. Olsen. Thill coupling, Kuepfert & Stadier. Thill coupling, C. C. Wallace. Thrashing machine and separator, F. Strobel. Time recorder, F. S. Cox. Tire, bicycle, O. W. Ketcham.	564,649 554,325 554,351 554,581 564,489
Thrashing machine and separator, F. Strobel. Time recorder, F. S. Cox. Tire, bicycle, O. W. Ketcham. Tire boit cutter, J. C. Cinich. Tires, machine for upsetting wheel, L. F. Faibanks. Tongue steadler, wagon, E. Britck. Toy, B. B. Whaley. Trace or hame book, J. W. Beckwith. Trap. See Animal trap. Bug or fee trap. Roat trap. Trolley and switch, electric railway, L. L. Stime.	F= 854,484 . 864,577 . 564,565 564,228
Trace or hame book, J. W. Beckwith. Trap. See Animal trap. Bug or fee trap. Road trap. Trolley and switch, electric railway, L. L. Stim	664,228 ch
Troley guard, J. H. Beazan	864,880
Trap. Trolley and switch, electric railway, L. L. Stim and D. Trolley guard, J. H. Bearan. Truck, car, J. A. Brill. Truck, car, J. A. Brill. Truck, car, J. A. Brill. Truck, car, J. C. Wands. Truck, car, J. C. Wands. Truck, electric, J. C. Wands. Truck, electric, J. Palica. Truck, telescopic, F. J. Palica. Truck, telescopic, F. J. Palica. Truck, telescopic, F. J. Palica. Tube. See Duplex tube. Tunting key, D. Fitler. Turbine wheels, making, J. B. McCormick, Jr. Turbines, automatic speed regulator for steam, L. Jonseon. Turkish bath, portable, J. M. Murphy. Type catting pump, J. West. Typewriting machine, J. M. Anderson. Typewriting machine, w. H. Brigss. Typewriting machine, electric, J. L. Garber Typewriting machine, electric, J. C. Garber Typewriting machine,	
Tube, telescopic, r. J. Pairca. Tube, See Duplex tube, Tuning key, D. Fitier. Turbine wheels, making, J. B. McCormick, Jr Turbine, automatic appear regulator for steam.	854,254 554,292
I. Jonson Turkish bath, portable, J. M. Murphy Type casting pump, J. West Typewriting machine, N. L. Anderson	564,425 564,527 95, 564,606 664,567
Typewriting machine, W. H. Briggs Typewriting machine, electric, J. L. Garber Typewriting machine ribbon holder, E. L. Fosts Umbrella fixture, H. D. Sabin	554,507 564,232 564,504 564,500 864,313 864,389
Umbrelia, tolding, S. J. Wilson. Umbrelia stand and lock, H. Ellsworth. Valve, W. J. McKay Valve, clean-out, McCormick & Fletcher Valve, for steam, or was a basiline specified.	564,618 564,456 564,744
D. F. Morgan. Valve, steam enging, S. Eide.	554,286 554,506 554,364
Valit, safety bank, T. Barnes. Vehicle running gear, O. Wilson. Vehicle, self-propelling, R. F. Stewart. Velocipede, ice, G. Von Otto.	554,411 554,472 554,319 554,346
Voltaic battery, S. R. V. Robinson. Wagon gear, J. Parent. Wardrobe, F. R. Pollard. Washer. Sde Ore washer.	564,427 564,584 564,397
Valve for steam or water beating apparatus, a D. F. Mornan. Valve, steam engine, S. Eide. Valve, steam engine cylinder, J. C. Gesty. Valut, safety bank, T. Barnes. Vehicle running gear, O. Wilson. Vehicle, self-propeiling, H. F. Stewart. Velocipede, les, G. Von Otto. Voltaic battery, S. K. V. Rubinson. Macon gear. Wanner, S. E. Pland. Wanher. Self-pland. Washer, J. M. White. Washing machine, Walters & Cadwainder. Watch dial fastening device, G. E. Hart. Water closet sont, E. L. Taft. Water closet, S. C. Noble. Water heater, B. C. Noble. Water heel, turbine, J. B. McCormick, Jr. Well boring and drilling apparatus, Schonek Helton.	564,563 564,511 564,561 554,283 554,371
Water heater, B. C. Noble. Water wheel, turbine, J. B. McCormick, Jr. Well boring and drilling apparatus, Schonek Helton. Wells, device for flowing, L. Stephens.	& 554,291 & 554,815 . 554,548
Well coring and criting apparatus, Science Holton Wells, device for flowing, L. Stephens. Wheel. See Car wheel. Firth wheel. Sprock Wheel for train carnedo. T. Miller Wick raising or lowering device, A. B. Welch. Winding or spooling machine, thread, J. W. Foter.	et 554,523 554,494
Window and blind, A. Sommerfeld Wire handles, machine for making, D. L. Hill	554,468
Wire notting maceines, cop houser for, A. E. ha low. Wool washing machine, M. Musgreave Wrench, T. Geisel. Wrench, P. Lorang.	554,258 554,289 554,566 554,284
TRADE MARKS.	
Ash pans, C. O'Mahony Baking powder, Lamp Chimney Baking Pow Company Baking powder, Northwestern Manufacture	Ter mafern
Baking powder, Northwestern Manufactur Company tonics, lager, C. A. King, Beverages, non-alcoholic, tox & Company, brushes, solid back, Ames Bouner Company, Canned gross peas, Afbert Landreth Seed Co.	27,797 27,771 27,772 27,760
Canned green peas, Albert Landroth Seed Copany, Ceroals, Muscatine Oat Meal Company, Cosmetics, A. Lathrop, Currants, cleaned, Houven Mercantile Compan Cutlery, including clippers, rance strops, lather brushes, Hibbard, Spencer, Bartlett	27,781 27,777 27,763 7,27,776
Currants, cleaned, 110, ven ingreasting Companication, including Chippers, maor strope, a lather brusbes. Hibbard, Spencer, Bartlett Company, Egg beaters, B. Bryce. Farm implements, Hibbard, Spencer, Bartlett Farm implements.	A.
Farm Implements, Hibbard, Spencer, Bartlett Company Firearms and sporting goods, Hibbard, Spenc Bartlett & Company Flour, wheat, Hicks Brown Milling Company.	di
Gum and solidined muchage, adherive tablet,	III. on our
G. Smiley. Hardware and shell bardware, articles of, H bard, Spencer, Bartlett & Company. Ico cream freesers, milk cans, and other houseb articles, Hibbard, Spencer, Bartlett & Coupa fins for marking liben, indelble, Auerican Re	27,792 old ny 27,790
Lamps, carbon rods for electric are. F. Hardtmu	th
& Company Limestone, crushed, Bowker Fertilizer Company Milk, cream, and cheese, New York Condens Milk Company Cintment for cure of piles, C. Berkovitz.	27,736 7. 27,768 ed 27,775
Limestone, crusned, nowaer rectinier Company, Milk, cream, and cheese, New York Condens Milk Company. Ointment for cure of piles, C. Berkovitz. Ointments, J. L. Bull. Plattic, compound for removing, C. S. Balley, Plattic, compound for removing, C. S. Balley, Plattic, rifles, and sportful gines, Coll's Pate Fire Arms Manufacturing (Company, Company,	77,754 27,767 27,767 27,767
ments, W. R. Warner	to 27,784
pany Tsa, H. C. Fisher Tobacco, chewing, J. W. Biackweider. Tollet, powder, O. Samosta	27,798 75, 27,774 27,769 27,764
pany Tes, H. C. Fisher	27,765 27,763 27,770
DESIGNS.	
Ax, W. A. Grimes. Boat, pleasure, W. H. Mullins. Button, A. Shuman. Carpet, A. Bunel. Carpet, N. S. Stewart. 35,1	25,159 25,136 to 25,168 84, 25,165

	DESIGNS.	
Boot pleasure	w. H. Mulline	22
Carnot, N. M. Nes	par	26
Chair, student's,	H. E. Hunter	70
Hamper, clother	erwood & Hunter	2
Lamp base, L. H.	L. J. Strang. ornberger	20
Oil guard, J. A.	Giles	N 20 W
Stoven, high she	os & Dey	98
Table vessel. L.	C. Forrester	20
Yoke book, neck	, G. A. & F. O. Gregerson	20

A printed copy of the specification and drawing on my patent in the foregoing list, or any patent in printed sessed since 1868, will be furnished from this office for contact. In ordering please state the name and number of the patent desired, and remit to Munn & Co., 35 troadway, New York.

Canadian parents pay now be obtained by the inventors for any of the inventions named in the fore toing list, provided they are simple, at a cost of \$40 each formplicated the cost will be a little more. For full instructions address Mann & Co., 361 Broadway. New lork. Other foreign patents more also be obtained.

Movertisements.

ORDINARY RATES.

incide Page, each insertion - - 75 cents a line lines Page, each insertion - - - 81.00 a line

The above are conserved per sense line—shout eight or up per line. This notice shows the width of the anal to set in arate type. Theravina may bead adversements as the same rate per same line, by measurements, as the letter press. Advertisements must be secured at Publication Office as early as Thursday servine and appear in the religions week's law.



WOOD OF JUETAL WORKERS Willout Ateans power can save fine and sweet, by using our Foot and Hand Power Machinery

A-Wood-working Machinery.

B-Lather, etc. SENECA FALLS MFG. COMPANY,

605 Water St., Seneon Falls, N. Y. AMERICAN PATENTS.—AN INTEResting not valuable table showing the number of patents
granted for the various subjects upon which petitions
have been filed from the beginning down to December
21. 188. Contained in Scientific American SurPlement, No. 1692. Price is cents. To be had at
this office and from all newsdesiers

POWER & FOOT SMAPERS PLANERS OFFILES SEED OF THE STATE OF THE STATE OF THE SEED OF THE STATE OF

DOUBLE STEL

SQUARE. 256 inch for toolmakers.
As shown. 20,6 inch for toolmakers.
As shown. 30,60
With either howel or narrow blade. 2.30
Complete. 30,60
Bi peep catalogue of Fine Thele, free.
The L.S. STARRETT CO.
BOX 18, ATHOL, MASS., U.S. A.



The Curtis Steam Pressure Regulator -

A steam saving appliance of establish value. May be used wherever necess to control or reduce steam pressure, employment zecams a great saving in opating expenses.

Send for circular S. A. D'ESTE & SEELEY CO. 29-3.3 Haverbill St., Boston

ARMSTRONG'S . PIPE . THREADING



CUTTING-OFF MACHINES Both Hand and Power, Sizes I to 6 inches, Water, Gas, and Steam Fit-lers' Tools, Hinged Pipe Vises, Pipe Cutters. Stocks and I has acknowledged to be

THE BEST, EN Send for catalog THE ARMSTRONG MFG. CO. Bridgeport, Conn.

ACETYLENE GAS AND CARBIDE OF STIFTC AMBRICAN SCPPLEMENT, Nos. 398, 1667, 1612, 1614, 1613, 1616, 1622, and 1638; also Scientific American, Nos. 1.7; 28, vol. 74, and 2, vol. 74. Frice 16 cents for be had at this office and from all newsdoulers.



NICKEL

ELECTRO-PLATING Apparatus and Material.

Hanson & Van Winkle Co. Newark. N. J.

TELEPHONES

That are good-not 'cheap things." The difference in cost is likele. We guarantee our apparatus an guarantee our customers against loss by patent suits our guarantee and instruments are 100 TH 400 D.

WESTERN TELEPHONE CONSTRUCTION CO.,

460 Monadnock Block, CHICAGO of Manufacturers of Telephones in the United States



rated cotalog and particulars by return man PHCENIX INTERIOR TELEPHONE CO., III Liberty St., New York. New Friction Disk Drill.

HELLO, CENTRAL!

FOR LIGHT WORK.

Has these Great Advantages:
The speed can be instantly changed from 6 to 1600
without stopping or chifting belts. Power applied
can be graduated to drive, with equal safety, the
mailest or ingreed fellis within its range—a wonferival concessy in time and great saving in drill
breakage. Sund for cashingues. bruskage. Sund for catalogue.

W. F. & INO. BARNES CO.,

1999 Ruby St., - Rockford, Ill,

THE ORNAMENTAL IRON INDUSresume tron into ornamental and artistic forms. With 9 illustrations. Contained in SCHENTIFIC AMERICAN SUPPLINEST. No. 1920, Frice 19 cents. To be had at this office and from all newscholers.



HYPNOTISM My original method 22, 160 pp. pam-philet life. One on Personal Magnet-tem Nr. Dr. Anderson, 8 & Magnet Temple Chicago.

Invest Time, Energy, and **Brains Successfully?**

with or without Technical Knowledge.

The Coming Building Material.

Concrete and Twisted Iron construction ahead of all other systems in editoring the Concrete Surfaces (pitched, nigged, or tooled). The resemblance between these Concrete Surfaces (pitche natural

GHTLY CRACKS prevented by shrinkage joints, invisible, unobjectionable, CONCRETE WALLS unit plumb by easily standed and economical moiding applications of the Concrete Walls of

RANSOME & SMITH CO.,

cards, circulars, &c
Press for printing
a small paper, \$60.

Press for printing
A small paper, \$60.

LITTLE GIANT SCREW PLATES

Wire sizes for Jovelora, Dentists, Tool Makers, and Amateurs
with Taper, Plus,
and Bottoming tape
for pips and blevele
work. Also blacksmiths and carriage
waters use. EF Send for fully illustrated catalogue.
WELLS BROS & CO., P.O. Box B, Greenfield, Mass.

VELOCITY OF ICE BOATS. A COL-lection of interesting letters to the editor of the SCHN-TIFIC AMERICAN on the question of the speed of ice boats, demonstrating how and why it is that these craft sail faster than the wind which propels them. Illustrated with 10 explanatory disarrams. College Price 10 cents, To be has at this office and from all newsdealers.

DEFIANCE MACHINE WORKS

Scientific Book Catalogue

Eclipse_

Bicycle Pumps

Cream Separators

are Closest Skimmers, Most Durable, Eastest Bunning, and far the Simple Hand or Power Separator on the market.

C. L. CHAPMAN SEPARATOR WORKS, LITTLE FALLS, N. Y.

"CYCLONES" ARE BEST.

ving them. Also PUMP CONNECTIONS

erfect fit guaranteed. Liberal discount

MUNN & CO., Pub

BUILDERS OF HUB, SPOKE HUB, SPOKE WHEEL, BENDING WAGON CARRIAGE

622 Boyleston Building,

DO YOUR OWN Bave money! Make money printing for pRINTING easy. Printed rules. Write for catalogue, presses, type, cards, tree value of the SCIENTIFIC AMERICAN as an advertise to factor the scientific and the scientific and

The value of the SCIENTIFIC AMERICAN as at tising medium cannot be overestimated. Its circles many times greater than that of any similar is many times greater than that of any similar journal now published. It goes into all the States and Territories, and is read in all the principal libraries and reading rooms of the world. A business man wants something more than to see his advertisement in a printed newspaper. He wants circulation. This he has when he advertises in the SCIENTIFIC AMERICAN. And do not let the advertising agent influence you to substitute some other paper for the SCIENTIFIC AMERICAN when selecting a list of publications in which you decide it is for your interest to advertise. This is frequently done for the reason that the accut gets a larger commission from the papers having a small circulation than is allowed on the SCIENTIFIC AMERICAN.

For rates see top of first column of this page or address MUNN & CO., Publishers.

361 Broadway, New Yerk.

CHICAGO.

THE BICYCLE: ITS INFLUENCE IN

DYNAMOS and ELECTRIC MOTORS



all who have the high grade, compound wound self oiling, self aligning bearings, high efficiency and great durability guaranteed. Lowest prices. Do your own lighting, no experience required. Send for catalogue and prices company plants furnished.

30-34 Market Street, Chicago, Ill., U. S. A.

RECENTLY PUBLISHED.
Our New Catalogue containing over 100 pages, including works on more than fifty different subjects. Will emailed free to any address on application.
IUNN & CO., Publishers SCHENTIPIO AMERICAN,
361 Brondway, New York. BALL BEARING AXLES AND RUB-

F. C. AUSTIN MFG. CO., CHICAGO, ILL.



A Sample



PSU USE GRINDSTONES? If so, we can supply you. All sizes mounted and numerated always kept in stock. Remember, we make a specialty of selecting stones for all special purposes. IF Ask for catalogue. The CLEVELAND STONE CO. 24 Floor. Wilshire. Cleveland. O.

The best manufactured. Specially adapted fo all kinds of light work, sawing machine outflet toys, dental drills, jewelern inthes, most received by the control of the contr

How to Build a Home

2426 Mentris Chicago



SMALL MOTORS for All Purposes.

ns and examples of Modern Architecture in the hands Architectural Magazine ever published . . .

"The Scientific American Building Edition."

Each number is illustrated with a Colored plate and numerous handsome engravings made direct from photographs of buildings, together with interior views, floor plans, description, cost, location, The illustrations

owners and architects names and addresses. The include soasbors, southern, colonial and city residence schools, public buildings, stables, carriage houses, etc.

All who contemplate building, or improving homes or of any tind, have in this handsome work an almost endicities and best examples from which to make selections, thus saving time and money.

PUBLISHED MONTHLY. SUBBGRIPTIONS \$2.50 A YEAR. SINGLE COPIES 25 CENTS.

For sale at all news stands, or address MUNN & CO., Publishers, 361 Broadway, New York

MUNN & CO., Publishers, Office of the SCIENTIFIC AMERICAN, 361 BROADWAY, NEW YORK.

MECHANICAL DRAWING

ence School of Industrial



GASOLINE ENGINES.

Cheapest Fub., Alexandreds in Successful Une. Simple Construction, Plundreds in Successful Une.

13" Write for dilustrated catalogue.

14" Write for Glustrated catalogue.

15" Write for Glustrated Catalogue.

16" Write for Glustrated Catalogue.

16" Write for Glustrated Catalogue.

18" Write for Glustrated Catalogue.

19" Write for Glustrated

VAPOR LAUNCH.

Marine Vapor Engine Co., Jersey City, N. J.

THE MODERN ICE YACHT. - BY Geo, W. Polk. A new and valuable paper, containing full, practical directions and specifications for the construction of the fastest and best kinds of fee Yachts of the latest, most approved forms. Illustrated with engravings drawn to scale, showing the form, position, and arrangement of all the parts. Contained in Scientific American Supplements, No. 624, Price 10 cents. To be had at this office and of all newsdealers.

The Chicago Gas & Gasoline Engine



The simplest gas and gaseline engine on the market. Has no equal for absolute, steady speed and durability, it is a dwarf in size and a Samson in strength. Catalogue sent on application.

MANUFACTURED MY

J. J. NORMAN CO.,
48 "A" South Clinton 8t.,
CHICAGO, ILL.



NOW READY! Seventeenth Edition of

Experimental Science



120 Pages and 110 Superb Cuts added.

Just the thing for a holiday present for any normal statement, and the statement of any one interested in sete in the new matter contained in the last edition without the Scientific Use of the Phonograph, the carpitel illusion known as the Anorthoscope, toget with other new and interesting Optical Illusions, Optical Projection of Opaque Objects new experime in Projection, Iridescent Giass, some points in Pingaphy, including Hand Cameras, Cane Cameras, Gyrtensor of Electrical Distribution, Electrical Ore Fr. Riscarical Recker, Electric Chimes, How to C ef, Riccircal Harasse, and a great demonstrated and the Stars, and a great demonstrate resides, Study of the Stars, and a great demonstrate residence and the start of the sta

Founded by Mathew Curey, 1786.

NRY CAREY BAIRD & CO. ALPUBLISHERS, HOUSEELLERS & IMPORTERS alnut St., Philadelphin, Pa., U. S. A. New and Berised Catalogue of Fractical and Books, #0 pages, 8vo, and our other Catalogues lars, the whole covering every branch of Sciedto the Arts, sent free and free of postage in any part of the world who will furnish his

Part Played by Accident in Invention and Discovery.



. BOILER CLEANER .

COMPOUND
We Bon't Offer Grantites, but our Circular will give you the information that will enable you to Save Time, Trouble and Money. Tried, approved, and being used by the Largest Railways and Pitclories in the East.

OFFICE:
Kemble Bidg., 19 Whitehall St., N.Y.

CROOKES TUBES IN ROENTGEN'S OKES TOBES IN ROENTLENS
raphy.—The new photography as performed by
of Crockes tubes as a source of excitation. All
rookes tubes as a source of excitation. All
rookes tubes Scinntfile American SupplieNos. 184, 189, 238, 243, 244, 792, 795,
on 4980. These protusely illustrated Suppliecontain a most exhaustive series of articles on
stubes and the experiments performed with them
them will be found Prof. Crockes' early lectures
g very fully the experiments which so excited
rid, and which are now again exciting attention
nection with Roentiers' photography. Price 10
ach. To be had at this office and from all nows-



They have a tone that's all their own....

THE NEW are the stand-DEPARTURE w or 1 d BELLS over. Made in 18 and prices. Send posts for booklet to FHE NEW DE-PARTURE BELL CO., 210 North Ham yeven.

JAPAN AND CHINA

Do you wish to extend your trade to abovementioned countries? If so, write or call upon

RURNS, OVERTON & CO., Representing H. E. Reynell & Co., of Kobe, Japan. Constable Bidg., 5th Ave. and 18th St., New York City



IDEAS DEVELOPED. Absolute secrecy. Send for particulars. Advice and suggestions free. Correspondence and sample orders solicited. 25 years in business. Gardam & Son. 25 John St., New York.



Agents Wanted.

Agents Wanted.

New York Fire Proof Covering Co., 121 Liberty St., N. Y.

A Valuable Book



12,500 Receipts. 708 Pages. Price \$5. Bound in Sheep, \$6. Half-Morocco, \$6.50.

This appendid work contains a careful compilation of the most useful fluoreipts and Replies given in the Notes and Queries of correspondents as published in the Notes and Queries of correspondents as published in the Notes and Previous deriver in the Notes and Previous deriver in the Notes and Previous deriver in the Notes and Previous of the kind ever placed before the public. The work may be regarded as the product of the stude and practical experience of the ablest chemists and workers in all parts of the world; the information given being represented. It is by far the most comprehensive being represented. It is by far the most comprehensive being represented in the highest value, arranged and condensed in construction from all other devices. Assist the deaf workers in all parts of the world; the information given by the prevention from all other devices fall, and where medical still has to force or any inquiry that can be thought of, relating to the prevention from all other devices fall, and where medical still has tries, will he most of many different preventions for working many different preventions. The force of the prevention from all other devices fall, and where medical still has tries, will he most comprehensive the force of the world; the information given in construction from all other devices fall, and where medical still has tries, will he work the deaf the prevention from all other devices fall, and where medical still has tries, will he most comprehensive the fall of the prevention from all other devices fall, and where medical still has tries, will he most comprehensive the fall of the world of the fall of the fall

MUNN & CO., Publishers,

SCIENTIFIC AMERICAN OFFICE, 361 Broadway, New York.



PAPER A Revolution in Photographic Printing.
Whon exposed to the same light, prints
500 times quicker than albumen.

GLOSSY or MATT. No dull or rainy weather to interfere with your work. No dull or rainy weather to interfere with your work. Developed and toned as fast as the printing frame can be filled. A choice of tones more beautiful than can be produced on any other paper. Permanent prints. The greatest paper and three sample prints. As cents in stamps brings two sample dozen cab's, developer and three sample prints. As cents in stamps brings two sample dozen cab's, developer and three sample prints. As cents in stamps brings two sample dozen cab's, developer and three sample prints. As cents in stamps brings two sample dozen cab's, developer and three sample prints. As cents in stamps brings two sample dozen cab's, developer and three sample prints. As cents in the paper are the best and most uniform in the market. Neppera P O F, an insoluble gelatine paper.

Rembrandt, a Mate Printing-out Paper.

STUDY A HOME Electricity, Mechanics Electricity, Mechanics By our unequaled Correspondence Method. E1.EC-TRICA t. A "PARATUS FURNISHED without extra cost. Special proposition now open. The Scientific Machinist Co., 51-52 Biackstone Bidg., Cleveland, O.

C. F. SPLITDORF, MANUFACTURING



SELF RELEASING

Breeching Hook Safety, economy, and convenience.

Sample. H. P. VAN WAGNER, Stony Creek, Oht., Can.

Price Reduced to \$10
Protect your Checks and Drafts
from Forgers. CHICAGO CHECK PERFORATOR

Ask your dealer for the mirs, order direct to the mirs, THE B. F. CUMMINS CO. 222 Clinton Street, Dept. A. 83 Nassau Street, Dept. B.

Hahn's Improved Watchman's Time Detector This Clock is adapted for 6 or 12 stations, and the keys are all different. The registering is done by numbers, ranging from 1 to 6 and 1 to 12, instead of as in the old style Time Detectors, which mark either whether or an impression on the dial



Brooders, Vegetable and Clover Cutters, BONE AND GRAIN MILLS MAKE HENS LAY


Peerless Incubator & Breeder Co 516 "A" Ohio Street, Quincy, IIL





The Stallman Dresser Trunk is a portable dressing case, with drawers instead of trays; the bottom is as accessible as the top. Costs no more than box trunk. Shipped C. O. D. with privilege to examine. 2c. stamp illustrated catalog.

STEREOPTICONS.
MAGIC LANTERNS AND
ACCESSORIES, SEND FOR CATALOGUE



SCROLL SAWS Food Power Hachinery, Tools, Forges, Drille, etc. Bend 4c for catalogue. Wilkings Co., 88 Randelph St., Chicago

Shorthand by Mail Thoroughly taught by re lesson Free. Potts Shorthand College, Williamsport, P. CE MACHINES. Corlins Engines. Brewers and Bottlers' Machinery. The VILTEI MFG. Co., St. Clinton Street, Milwaukoe, Wis.

States Calabase States Calabas BI-SULPHIDE for use in the arts, Killing Insects in Grain, Killing Burrowing An-OF CARBON imals, etc. Manufactured by he. R. T. Yl.Ok., Cleveland, Obio

DYNAMOS," Care and Management of. 26 illustrations. Pamphiet, Price 25c.
merican industrial Publishing Company,
Bridgeport, Conn.

TURBINE WATER WHEELS.
SEND FOR PAMPHLET.
SEND FOR P

DEAF he ss & HEAD NOISES CURED by my invisible Tubelar Ear Cushions. Whitpers heard, warranted to help more cases than all similar devices combined. Help earn as glausse do eyes. Sold by TREE

SAYE TWO PROFITS We sail our en-terior to the consumers. Special Offer to Agents Free, for State, Shears and Kuffe Sharpen-re. Diamond Cuttery Co. 60 Pway, S. Y.





96 pages, printed in 6 colum. Birdseye view of largest Poultry Farm. Tells all about Chickens, Prices of same, their Diseases, remedies, poultry buildings, etc.; finely illus-ted. Prise calyle. 6. 6. SHOTMAKE, Presport, Ills, U.S.



ICE HOUSE AND COLD ROOM.—BY R G. flatfield, With directions for construction. Four



VOLNEY W. MASON & CO. FRICTION PULLEYS, CLUTCHES, and ELEVATORS PROVIDENCE, R. I.



SEND for Catalogue of the Musical Instru-ment you think of buying. Violins repaired by the Cremona System. C. STORY, 20 Central St., Boston, Mass

THE FADING OF PIGMENTS,—A PA-





WOODEN TANKS.

W. E. CALDWELL CO., 217 E. Main Street, Louisville, Ky. FIRE BRICK FOR ALL PURPOSES.

BROOKLYN FIRE BRICK WORKS. SS Van Dyke Street, BROOKLYN, N. Y.

"Air Cushion" Rubber Stamps
ALWAYS MAKE A GOOD PRINT.
Stamp, Steneil and Soal Supplies,
Wholesale and Retail.
THE R. H. SMITH MFG. CO.,
Springfield, Mass.



Aimost every inquestion and arranged and condensed in construction from all other devices. Assist the dear in construction from all other devices fail, and where medical still he when all other devices fail, and where medical still he when all other devices fail, and where medical still he when all other devices fail, and where medical still he when all other devices fail, and where medical still he when all other devices fail, and where medical still he when all other devices fail, and where medical still he when all other devices fail, and where medical still he when all other devices fail, and where medical still he when all other devices fail, and where medical still he when all other devices fail, and where medical still he when all other devices. Assist the dear when all other devices fail, and where medical still he when all other devices. Assist the dear when all other devices fail, and where medical still he when all other devices. Assist the dear of the work. Our non-struction from all other devices. Assist the dear of the work of the work. Our non-struction from all other devices. Assist the dear of the work of the work of the work of the when all other devices. Assist the dear of the work of the work of the when all other devices. Assist the dear of the work of the work of the when all other devices. Assist the dear of the work of the work of the when all other devices. Assist the dear of the work of the work of the when all other devices. Assist the dear of the work of the when all other devices. Assist the dear of the work of the work of the when all other devices. Assist the dear of the work of the when all other devices. Assist the dear of the work of the when all other devices. Assist the dear of the work of the when all other devices. Assist the dear of the work of the when all other devices. Assist the dear of the work of the w REAGAN FEED WATER HEATING, WATER CIRCULATING AND

WATER CIRCULATING GRATE CO., Mirs. and Sole Props., Ucneral Office and Works, 1026-1028 Filbert St., Philadelphia, Pa.

Bicycle Repairing. A Manual compiled from rticles in "The Iron Age." By S. D. V. Burr. 8vo. loth. 166 pages, fully illustrated. N. Y., 1896... \$1.68 The pages of the page of the p

New * Books

Aluminum. Its History, Occurrence, Properties, detailurgy and Applications, including its Alloys. By foeeph W. Bichards. Thiak deliton, theroughly revised and greatly enlarged, 8vo, cioth. 189 pascs. Philatelphia, 186.

537 pages. 1830.
Chemist's Compendium for Pharmacists, Chemists and Students. Compiled by C. J. S. Thompson. 18mo, cloth. 25 pages. Landon, 1806.. 81.049
Civil Engineering. A Treatise on Civil Engineering. By W. M. Patton. 870.00 (civil Engineering. 87.38)
87.38

Dynome-Electric Machinery. A Manual for tudenta in Electrotechnics. By Silvanus P. Thompson. 13th editton, revised. 884 pages, fully illustrated. 8vo. loth. London, 1866. Electric Beating. By Edwin J. Houston and A. E. Kennelly (Elementary Electro-Technical Series). 2mo, cloth. 20 pages. Blustrated. N. Y., 1895. \$1.00

Electrical Bonts and Navigation. By Thomas Commerced Martin and Joseph Sacha. Svo. cloth. 98 Instrations. 24 pages. N. 1895. \$2.56 Electrical Transmission of Emergy. A Manual for the Design of Electrical Circuits. By Arthur Taughan Abott. With 9 folding plates. Svo. cloth. 580 ages. Illustrated. N. Y. 1895. \$4.50

Electricity for Everybody. Its Nature and Use xplained. By Philip Atkinson. With 190 illustrations ad portrait of the Author as a frontispiece. 12mo. oth. 260 pages. N. Y. 1896 cloth. 240 pages. N. Y. 1895

Gas. A Textbook of Gas Manufacture for Students.
By John Hornby (Technological Handbooks). 12mm, cloth. 361 pages. Illustrated. London 1896

Henting. American Steam and Mot. Water Heating Practice. From the Engineering Records. Being a sciented reprint of descriptions of the Company of the Heating. Practical Hot Water Heating, Steam and as Fitting. Illustrated. Showing the latest and more

Hefrigeration. Compend of Mechanical Refrigeration. A Comprehensive Digest of Applied Energy and Thermodynamics for the practical use of lee Mar facturers. Cold Storage Men. Contractors. Enginee Brewers Packers, and others increased in the applition of Refrigeration. By J. E. Slebel. mo, close 1865.

Shop Kinks and Machine Shop Chat: A series of over Five Hundred Practical Paragraphs, in a suitar language, showing special ways of doing work

FREE.

Our entirely new Catalogue of Scientific and Technical Books, containing over 3,000 titles, and embracing more than 300 different subjects, with Authors' Index, will be mailed free on application to any address in the world. Address

MUNN & CO.,

Publishers of the "Scientific American," 361 Broadway, New York.

Advertisements.

ORDINARY RATES.

Inside Page, each insertion. - 75 cents a line Back Page, each insertion. - 81.00 a line

The above are charges per agate line - shout eight words per ince. This notice shows the width of the line and in set in agate type. Engravating may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at Fublication Office as early as Thursday morning to appear in the following week's sense.

The "ROME"

All Latest Improvements. Always Absolutely Safe. Ask worse dealer for the "Rome" or rend to us for Descriptive Circulars and Prices.

Rome Manufacturing Co.

131 James Street,

Rome, N. Y.



MONARCH

KING OF BICYCLES

Beloved by his subjects because he does right by them. There's goodness and merit in every inch of his kingly fame.

Monarch Cycle Mfg. Co. Lake, Hubsted and Pulton Sta.

SCIENTIFIC AMERICAN SUPPLE-MENT. Any desired back manber of the SCIENTUPIC AMERICAN SUPPLEMENT can be had at this office for in comm. Also to be had of newederlors in all parts of

"NAPOLEON" **BICYCLES** ARE SUPERB.

Catalogue Free THE JENKINS CYCLE CO.
18 and 20 Custom House Place, Chicago

AGENTS WANTED POR FINE TOOLS IN EVERTSHOP CATALOGUE C.H.BESLY& CO.

The American Bell Telephone Company,

125 Milk Street, Boston, Mass.

This Company owns Letters-Patent No. 463,569, granted to Emile Berliner November 17, 1891, for a combined Telegraph and Telephone, covering all forms of Microphone Transmitters or contact Telephones.

MOTOR COMPANY, DAIMLER BUILDERS OF

Highest Grade Single and Twin Screw Launches.



Safest, cleanest and speediest power boat built.
No smoke or smokestack, no boiler, no electricity. No steam or naphtha under pressure.
Run on one pint of gasoline per horse power per hour, and are under way in less than one minute. No licensed engineer or pilot.

Also Stationary Motors.

Send for Illustrated Catalogue and Price List. OFFICE AND WORKS, "STEINWAY," LONG ISLAND CITY, N. Y.

PHOTOGRAPHIC-

The Pocket

EASTMAN KODAK CO. ROCHESTER, N. Y.

At 4 Price Sewing Machine of all v.



Brazing-Stand

Repair Shops, and Tool Room

Dental Manufacturing Co., Buffalo, N. Y.

WE ARE BUILDING . . The Celebrated-HORNSBY-AKROYD"

The De La Vergne Refrigerating Machine Co.





INDIANA BICYCLE CO., INDIANAPOLIS, IND.



The Scientific American Reference Book.

A most useful little bound book of 150 pages, comprising, probably, the most extensive variety of standard, practical, condensed information ever furnished to the public for so small a price, only 25 cents.

Among its contents are: The Last Census of the United States (2800), by States, Territories, and Counties; Tables of Cities having over 4800 ishabitants; Map of the United States—ministure outline; The Patent Laws full text); The Trade Mark Law (full text); The Principal Mechanical Movements—illustrated by 150 small diagrams—of value to inventors and designers of mechanism; Medaillon fortraits of Distinguished American Investors; Valuable Tables relating to Steam, Electricity, Heat, Metals, Weighta, and Measures.

[27] Swat by madi to dny address on receipt of price, 25 cents.

MUNN & CO., Publishers,

MUNN & CO., Publishers, 361 Broadway, New Yo MANUFACTURE OF BICYCLES. f these vehicles. With is en Scientific American Sup-ce 10 cents. To be had at this





Three New Model

Nos. 2, 3 AND 4 HAVE YOU EXAMINED THEM?

Many Improvements Heretofore Overlooked by

Address THE SMITH PREMIER TYPEWRITER COMPANY, Syracuse, N. Y., U.S. A.

ENGINES, Boilers and Machine Tools,

PRIESTMAN SAFETY OIL ENGINE

NEITHER Korosene, NOT Gaseline NOR ENGINEER Economical, Simple, Safe, Au-tomatic. For Efectric Light-ing, Pumping, Milling, etc. PRIESTMAN & COMPANY, Inc.

There is hardly a USE OF POWER

CHARTER GAS ENGINE CO., P. O. Box 148, Sterling, III.



OF ESTABLISHED 1845.

The Most Popular Scientific Paper in the World Only \$3.00 a Year, including Postage. Weekly--52 Numbers a Year.

Weekly-52 Numbers a Year.

This widely circulated and splendidly illustrated paper is published weekly. Every number contains sixteen pages of useful information and a large number of original engravings of new inventions and discoveries, representing Engineering Works, Steam Machinery, New Inventions, Novelties in Mechanics, Manufactures, Chemistry, Electricity, Telescaphy, Photography, Architecture, Agriculture, Harticulture, Tatural History, etc. Complete list of Patents each week.

Terms of Subscription.—One copy of the Scientiff Agriculture, Harticulture, Tatural History, etc. Complete list of Patents each week.

Terms of Subscription.—One copy of the Scientiff Agriculture, Satural History, etc. Complete list of Patents each week.

Terms of Subscription.—One copy of the Scientiff Agriculture, Satural History, etc. Complete list of Patents each week.

Terms of Subscription.—One copy of the Scientiff Agriculture, Satural History, etc.

Canada, or Mexico, on receipt of Three Dellars by the publishers; six months, \$1.50; three months, \$1.50.

Clubs.—Special rates for several names, and to Postmasters. Write for particulars.

The safest way to remit is by Postal Order, Draft, or Express Money Order. Money carefully placed inside of envelopes, securely sealed, and correctly addressed, seldom goes astray, but is at the sendgri risk: Address all letters and make all orders, drafts, etc., payable to MUNN & CO., 361 Brondway, New York.

Scientific American Supplement

This is a separate and distinct publication from THE SCIENTIFIC AMERICAN, but is uniform therewith in size, every mumber containing states large pages fall of engravings, many of which are taken from foreign papers and secompanied with translated descriptions. THE SCIENTIFIC AMERICAN SUPPLEMENT is published weekly, and includes a very wide range of contents. It presents the most recent papers by eminent writers in all the principal departments of Science and the Useful Arts, embracing Biology Geology, Maternalogy, Natural History, Geography Archeology, Astronomy, Chemistry, Electricity, Light, Heat, Mechanical Engineering, Steam and Railway Engineering, Mining, Ship Building, Marine Engineering, Photography, Technology, Manufacturing Industries, Sanitary Engineering, Agriculture, Hortsculture, Domestic Economy, Wiography, Medicine, etc. A vast amount of fresh and valuable information obtainable in no other publication.

The most important Engineering Forks, Mechanisms, and Manufactures at home and abroad are illustrated and described in the SUPPLEMENT.

Price for the SUPPLEMENT.

r, express money order, or check, MUNN & CO., 361 Brendway, New York.

Building Edition.

THE SCIENTIFIC AMERICAN BUILDING EDITION is insued monthly. \$3.50 a year. Single copies, 25 cents. Thirty-two large quarto pages, forming a large and spiendid Magasine of Architecture, richly adorned with elegant plates and other fine engravings; illustrating the most integrating examples of modern Architectural Construction and allied subjects.

A special feature is the prosentation in each number of a variety of the latest and best plans for private residences, city and country, including those of very moderate cost as well as the more expensive. Drawings in perspective and in ceior are given, tozether with Floor Plans, Descriptions, Locations, listimated Cost, etc.

The elegance and cheapness of this magnificent work have won for it the Largest Circulation of any Architectural publication in the world. Said by all newsdealers. \$2.50 a year. Hemit to

MUNN & CO., 361 Broadway, New Yerk.

Export Edition

of the SCIENTIFIC AMERICAN, with which is incorporated "LA AMERICA CLENTIFICA E INDUSTRIAL," or Spanish edition of the SCIENTIFIC AMERICAN is published monthly, and is uniform to size and typography with the SCIENTIFIC AMERICAN. Every number contains about 50 cross recognition of the contains about 50 cross recognition of the contains about 50 cross recognition about 10 cross recognition about 10 cross recognition and the contains about 10 cross recognition about 10 cross recognition about 10 cross recognition about 10 cross recognition and 10 cross recognition about 10 cross recognition about 10 cross recognition about 10 cross recognition and 10 cross recognition about 10 cross recognition and 10 cross recognition about 10 cross recognition and 10 cross recog scientific, industrial export paper published. It circulates throughout Cuba, the West Indies, Mexico, Central and South America, Spain and Spanish possessions—wherever the Spanish language as spoken. THE SCIENTIFIC AMERICAN EXPORT EDITION has a large

ost. Rates upon application.

MUNN & CO., Publishers,

361 Broadway, New York.

PRINTING INKS.